




 **RELLPIPE**
LEAN & DIY
PIPE RACKING SYSTEM
物料架

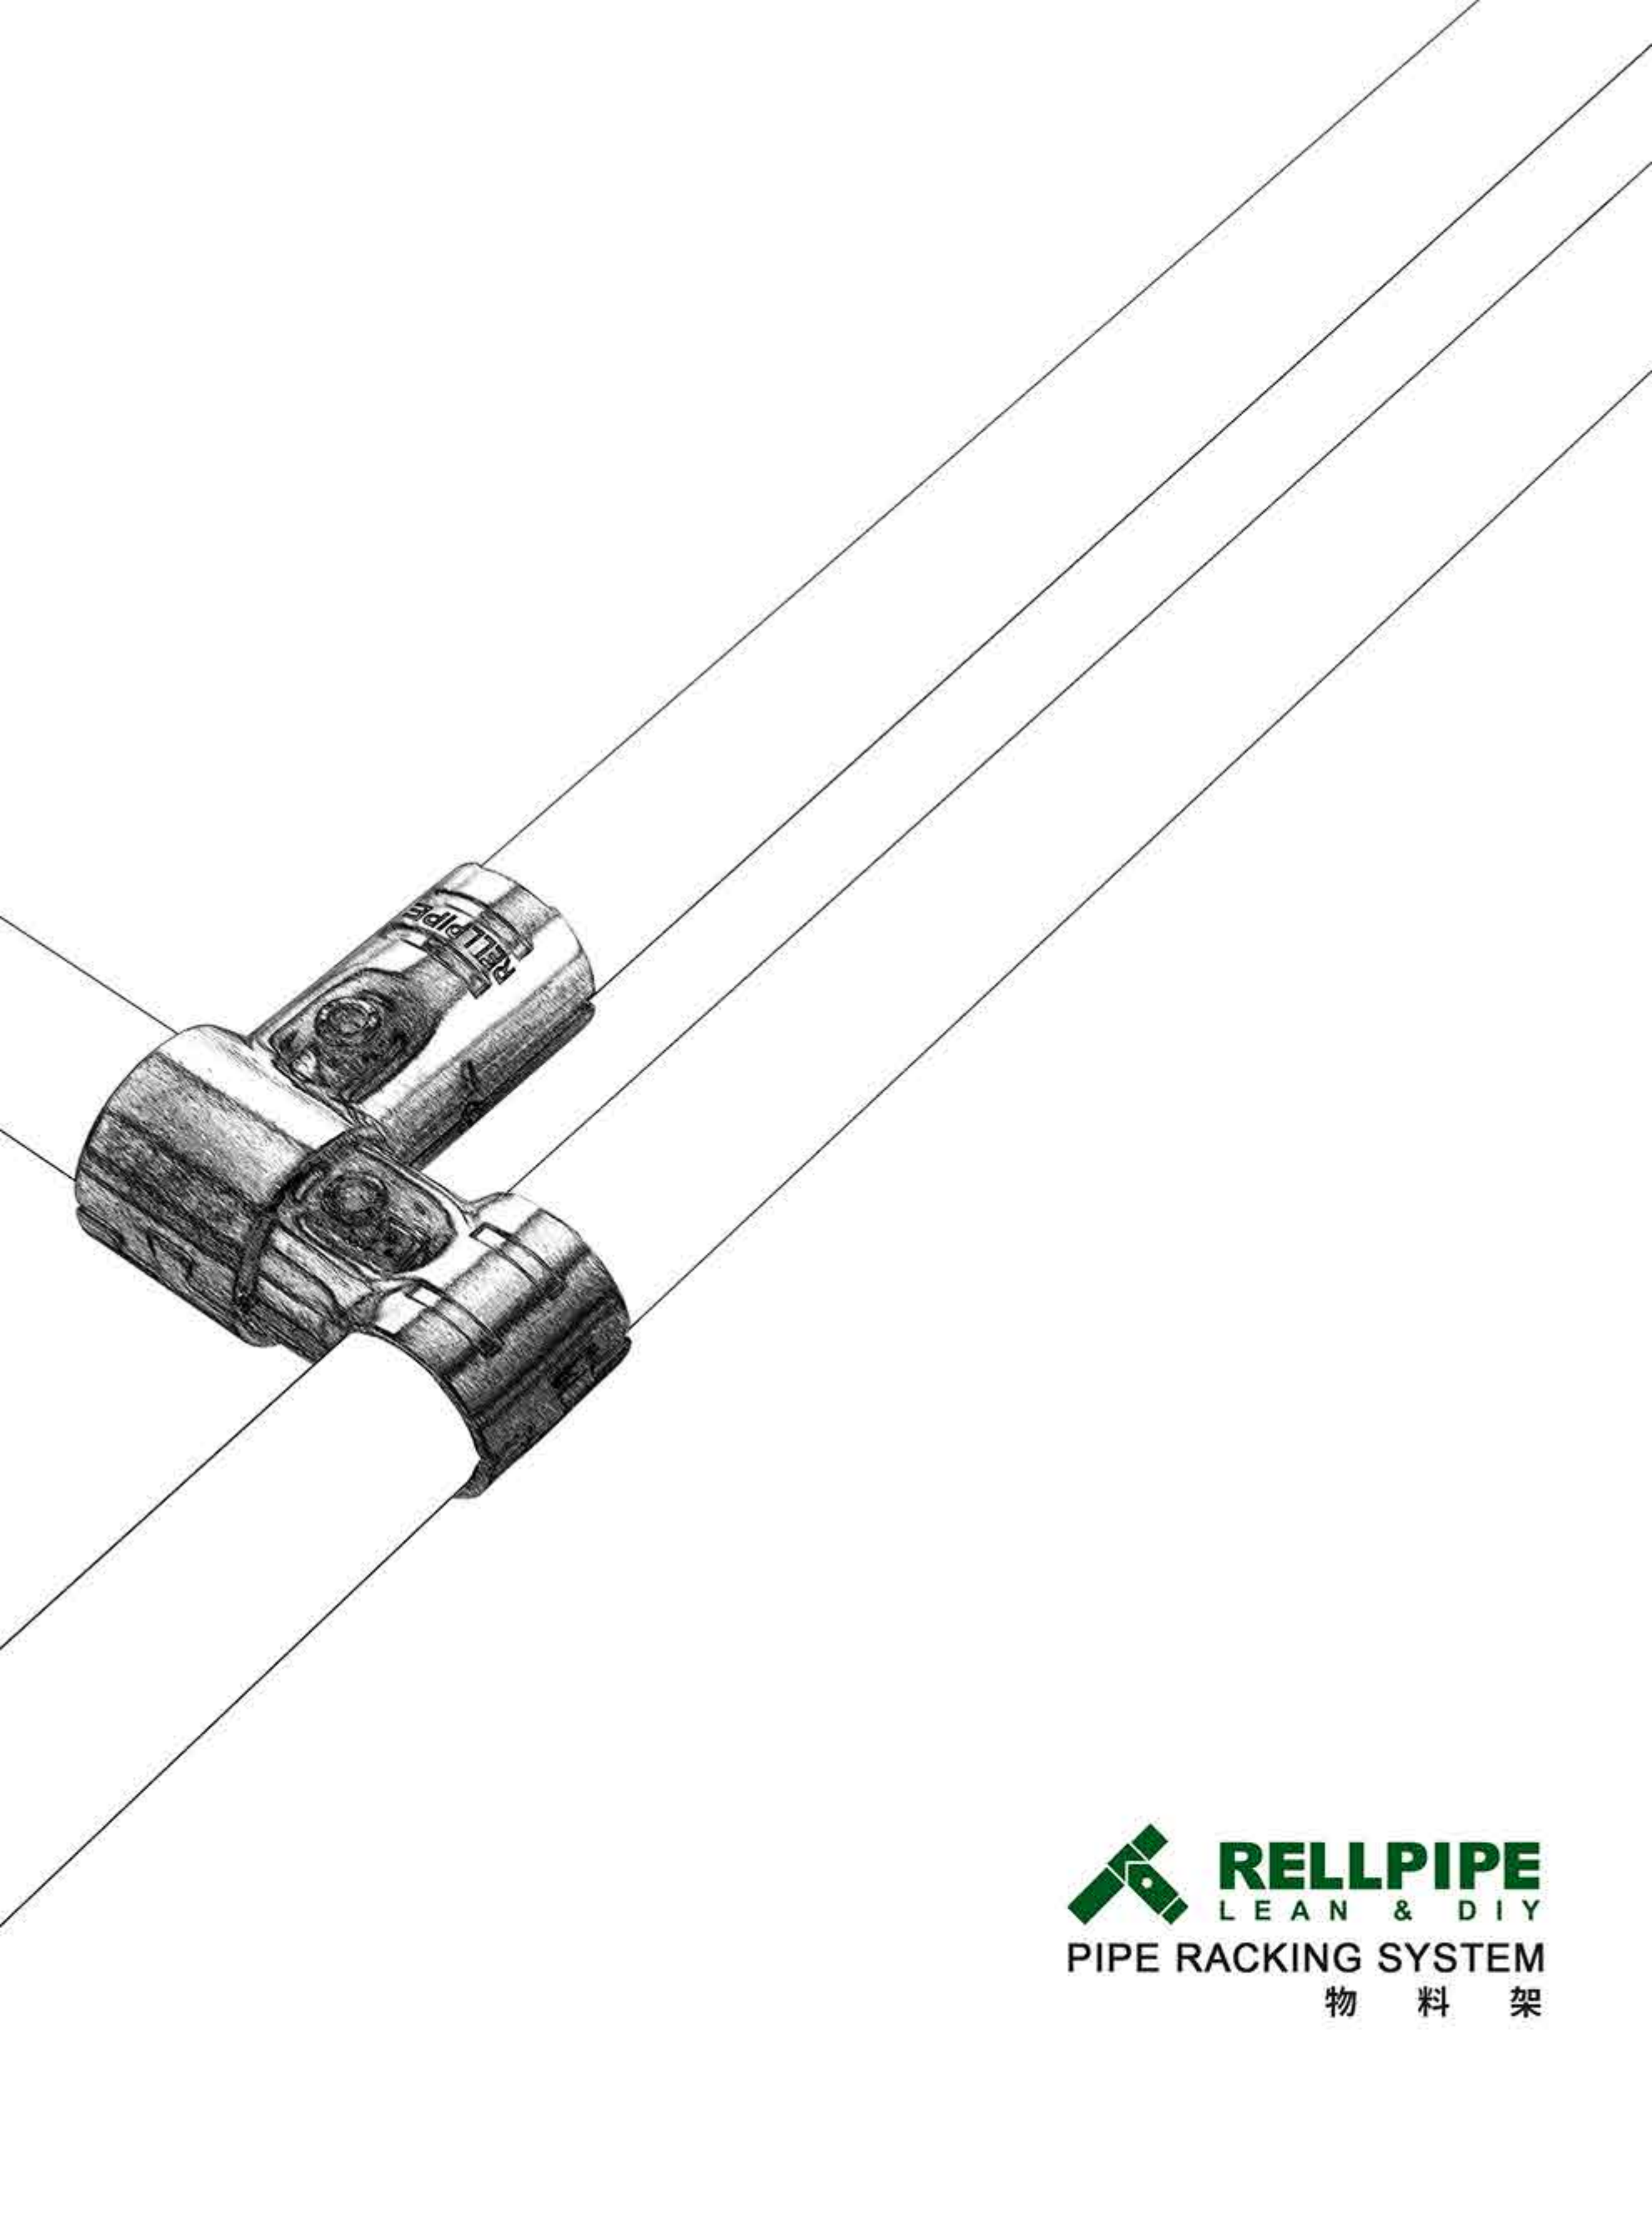

物料架制造商

成立时间：2006年5月

厂房面积：约6000m²

员工人数：31人(2025年1月)

年产值：约5000万人民币(2024年)

发展历程





Pipe Racking System Producer

Established date: May , 2006

Factory volume: about 6000m³

Number of employees: 31 (2025.01)

Annual turnover: about 50 million RMB (2024)

Development History



CONTENTS

		PIPES P01	T Series
		METAL JOINTS P05	HJ Series
		METAL JOINTS 2.6 Series P11 2.3 Series P15 2.0 Series P15	H Series
		ROLLER TRACKS P17	R Series
		PLASTICS P30	P Series
		METAL ACCESSORIES P35	F Series
		LEVELING FEET P41	L Series
		FASTENERS P45	N Series
		CASTERS P49	C Series
		40 SQUARE PIPE P53	S Series
		27 SQUARE PIPE P55	K Series
		ALUMINIUM P59	A Series
		TOOLS P65	O Series



T Series PIPES

Coated Pipe



1. Production Craft

This craft includes single-step and automatic integrated process.

Because of the high cost of the first craft, RELI suggests the second one. Moreover, we have successfully researched the automatic integrating pipe craft.

2. Performance and Parameters

Pipe is composed of five parts.

It can be provided according to customers different requirements on performance.

Powder Coated Pipe



1. Colorful

Wider selection of colors and textures.

2. UV light resistance

Can be used in outdoors.

3. Non-flammable

No emission of toxic fumes in fire.

4. Economical

20% less than coated pipe. 35% less than ESD pipe. 30% less than SUS pipe.

5. Environmental

Powder coated pipe is fully recyclable. Powder coated pipe of internal and external surface.

SUS Pipe



1. High Strength & Durability

Surface resistant to light abrasion or contact with metal tools.

2. High Oil & Chemical Resistance

High resistance to oil, solvents, bleaches, etc.

3. Non-flammable

Inherently non-flammable.

4. Conductive

Inherently conductive.

5. Environmental

SUS pipe is fully recyclable.

Galvanized Pipe



1. Economical

2. UV light & Chemical resistance

High resistance to UV light, oil, solvents, bleaches, etc.

3. Non-flammable

Inherently non-flammable.

4. Conductive

Inherently conductive.

5. Environmental

Galvanized pipe is fully recyclable.

Aluminum Alloy Pipe



1. Environmental

Aluminum pipe achieves a superb recyclability.

2. Weight

Weight reduced by 40% comparing with steel coated pipe.

3. Aesthetic

Alumite treatment allows for "maintenance-free", excellent appearance that lasts for long.

Unit : mm

PE Coated Pipe 2440			28 x 1.0			
Green(N)			T-PE10N2440			
Blue(U)			T-PE10U2440			
Red(R)			T-PE10R2440			
Orange(E)			T-PE10E2440			
Yellow(Y)			T-PE10Y2440			
LightYellow(LY)			T-PE10LY2440			
Ivory(V)			T-PE10V2440			
Grey(G)			T-PE10G2440			
Dark Grey(DG)			T-PE10DG2440			
Black(B)			T-PE10B2440			
Snow White(SW)			T-PE10SW2440			
Milky White(MW)			T-PE10MW2440			

PE Coated Pipe 4000	28 x 0.7	28 x 0.9	28 x 1.0	28 x 1.1	28 x 1.4	28 x 2.0
Green(N)	T-PE07N	T-PE09N	T-PE10N	T-PE11N	T-PE14N	T-PE20N
Blue(U)	T-PE07U	T-PE09U	T-PE10U	T-PE11U	T-PE14U	T-PE20U
Red(R)	T-PE07R	T-PE09R	T-PE10R	T-PE11R	T-PE14R	T-PE20R
Orange(E)	T-PE07E	T-PE09E	T-PE10E	T-PE11E	T-PE14E	T-PE20E
Yellow(Y)	T-PE07Y	T-PE09Y	T-PE10Y	T-PE11Y	T-PE14Y	T-PE20Y
LightYellow(LY)	T-PE07LY	T-PE09LY	T-PE10LY	T-PE11LY	T-PE14LY	T-PE20LY
Ivory(V)	T-PE07V	T-PE09V	T-PE10V	T-PE11V	T-PE14V	T-PE20V
Grey(G)	T-PE07G	T-PE09G	T-PE10G	T-PE11G	T-PE14G	T-PE20G
Dark Grey(DG)	T-PE07DG	T-PE09DG	T-PE10DG	T-PE11DG	T-PE14DG	T-PE20DG
Black(B)	T-PE07B	T-PE09B	T-PE10B	T-PE11B	T-PE14B	T-PE20B
Snow White(SW)	T-PE07SW	T-PE09SW	T-PE10SW	T-PE11SW	T-PE14SW	T-PE20SW
Milky White(MW)	T-PE07MW	T-PE09MW	T-PE10MW	T-PE11MW	T-PE14MW	T-PE20MW

ABS Coated Pipe 4000			28 x 1.0			28 x 2.0
Green(N)			T-ABS10N			T-ABS20N
Blue(U)			T-ABS10U			T-ABS20U
Red(R)			T-ABS10R			T-ABS20R
Orange(E)			T-ABS10E			T-ABS20E
Yellow(Y)			T-ABS10Y			T-ABS20Y
LightYellow(LY)			T-ABS10LY			T-ABS20LY
Ivory(V)			T-ABS10V			T-ABS20V
Grey(G)			T-ABS10G			T-ABS20G
Dark Grey(DG)			T-ABS10DG			T-ABS20DG
Black(B)			T-ABS10B			T-ABS20B
Snow White(SW)			T-ABS10SW			T-ABS20SW
Milky White(MW)			T-ABS10MW			T-ABS20MW

PIPES

Powder Coated Pipe 4000			28 x 1.0			
Green(N)			T-PW10N			
Blue(U)			T-PW10U			
Red(R)			T-PW10R			
Orange(E)			T-PW10E			
Yellow(Y)			T-PW10Y			
LightYellow(LY)			T-PW10LY			
Ivory(V)			T-PW10V			
Grey(G)			T-PW10G			
Dark Grey(DG)			T-PW10DG			
Black(B)			T-PW10B			
Snow White(SW)			T-PW10SW			
Milky White(MW)			T-PW10MW			
ESD Pipe			28 x 1.0			28 x 2.0
Black(B)			T-ESD10B			T-ESD20B
Black(B)			T-ESD10B2440			
Flat Pipe			28 x 1.0			
			T-FL10V			
			T-FL10U2440			
Slide Pipe			28 x 1.0			
			T-SL10V			
SUS 201 Pipe	28 x 0.7	28 x 0.9		28 x 1.1		
	T-SUS07	T-SUS09		T-SUS11		
STS 409 Pipe	28 x 0.7					
	T-ST07					
	T-ST072440					
Galvanized Pipe			28 x 1.0			
			T-ZN10			
Aluminum Alloy Pipe				28 x 1.2		
				T-AL12OX		

HJ Series

METAL JOINTS



METAL JOINTS



SURFACE : ●BK ●WZ ●NP ●CP ●PC

HJ-1



HJ-1A



HJ-2



HJ-3



HJ-4



HJ-5




HJ-6



HJ-6A




HJ-6B

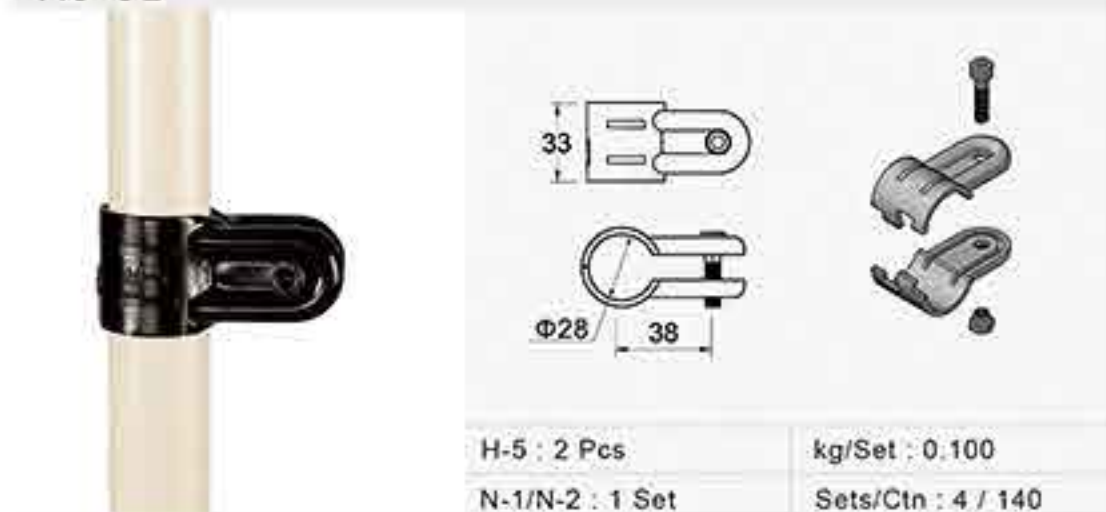

HJ-6C




HJ-7




H-7 : 2 Pcs	kg/Set : 0.110
N-1/N-2 : 1 Set	Sets/Ctn : 4 / 90

HJ-7A




H-7A : 2 Pcs	kg/Set : 0.090
N-1/N-2 : 1 Set	Sets/Ctn : 4 / 140

HJ-8




H-8 : 1 Pc	kg/Set : 0.140
H-9 : 1 Pc	Sets/Ctn : 4 / 130
N-1/N-2 : 1 Set	

HJ-9





H-9 : 2 Pcs	kg/Set : 0.135
N-1/N-2 : 1 Set	Sets/Ctn : 4 / 150

HJ-10




H-10 : 2 Pcs	kg/Set : 0.120
N-1/N-2M612 : 1 Set	Sets/Ctn : 4 / 150

HJ-11




H-11 : 2 Pcs	kg/Set : 0.140
P-6 : 1 Pc	Sets/Ctn : 4 / 80
N-1/N-2M612 : 1 Set	

HJ-12




H-12 : 2 Pcs	kg/Set : 0.150
P-6 : 1 Pc	Sets/Ctn : 4 / 70
N-1/N-2 : 1 Set	

HJ-13




H-13 : 2 Pcs	kg/Set : 0.120
N-1/N-2 : 1 Set	Sets/Ctn : 4 / 140

HJ-13A



H-13A : 2 Pcs	kg/Set : 0.120
N-1/N-2 : 1 Set	Sets/Ctn : 4 / 140

HJ-13B



H-13B : 2 Pcs	kg/Set : 0.120
N-1/N-2 : 1 Set	Sets/Ctn : 4 / 250

METAL JOINTS



SURFACE : ●BK ●WZ ●NP ○CP ●PC


HJ-14



HJ-14A



HJ-15

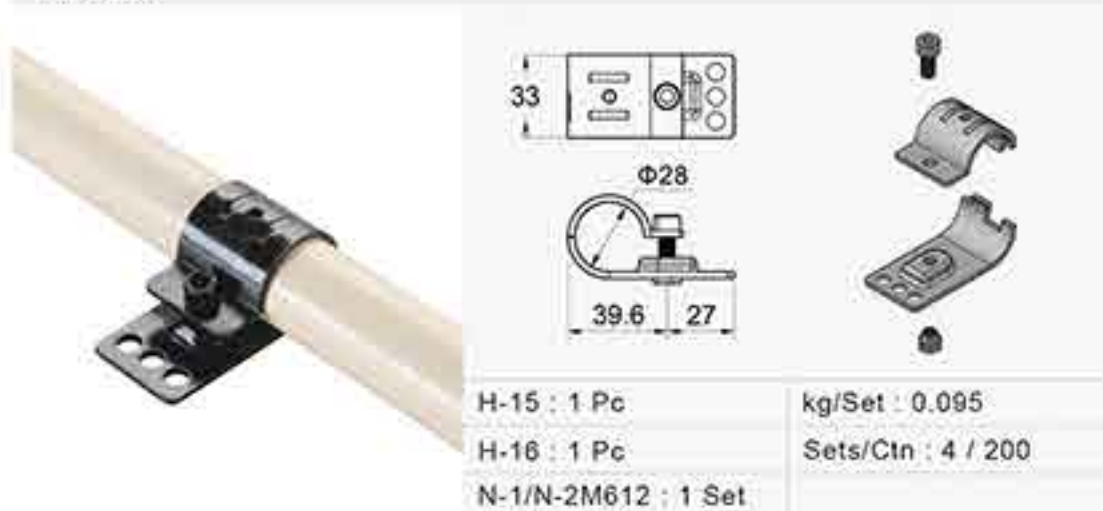

HJ-15A



HJ-17




HJ-19




HJ-20



HJ-20A

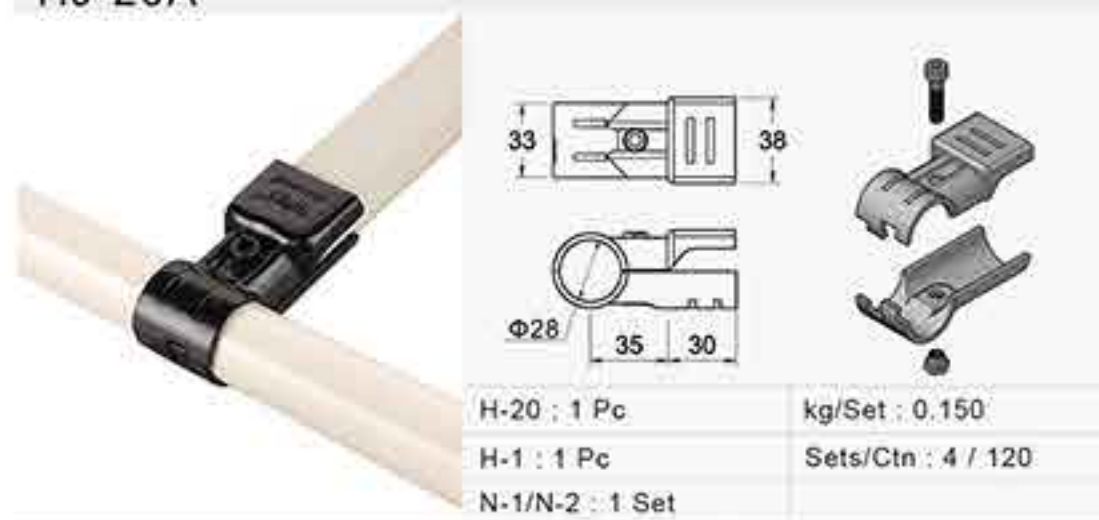


HJ-21

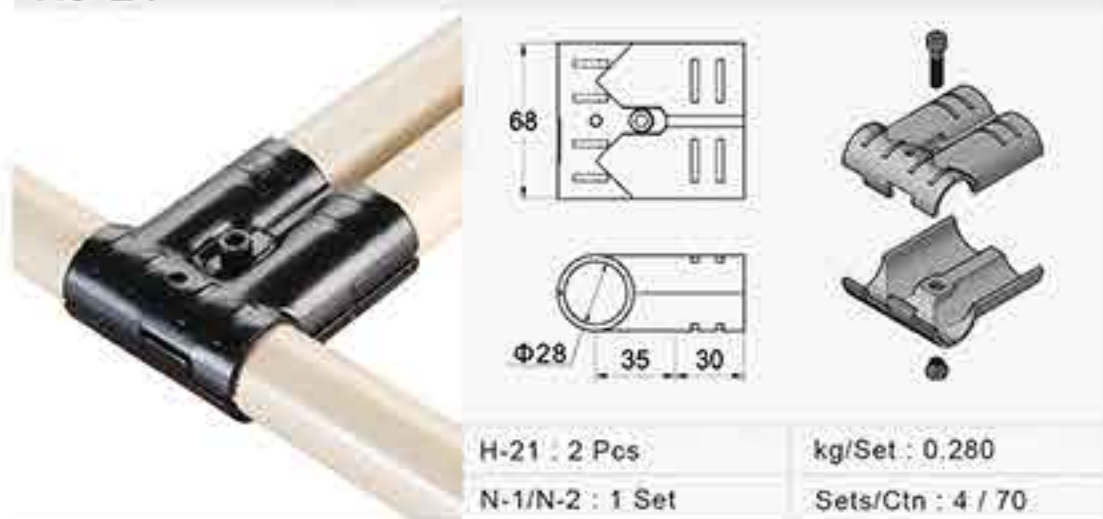

HJ-23



HJ-24

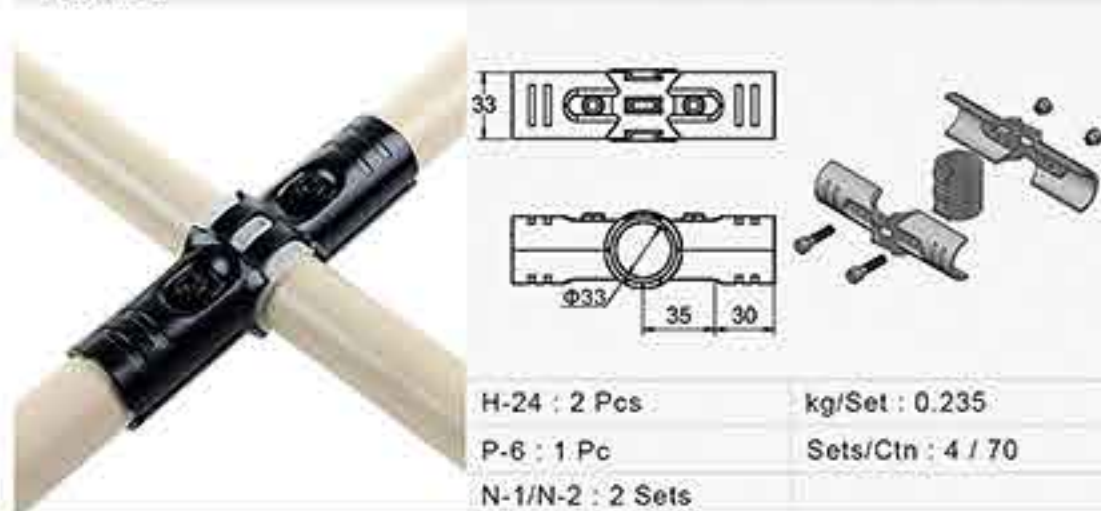

HJ-30



HJ-45




HJ-60




HJ-90



HJ-110

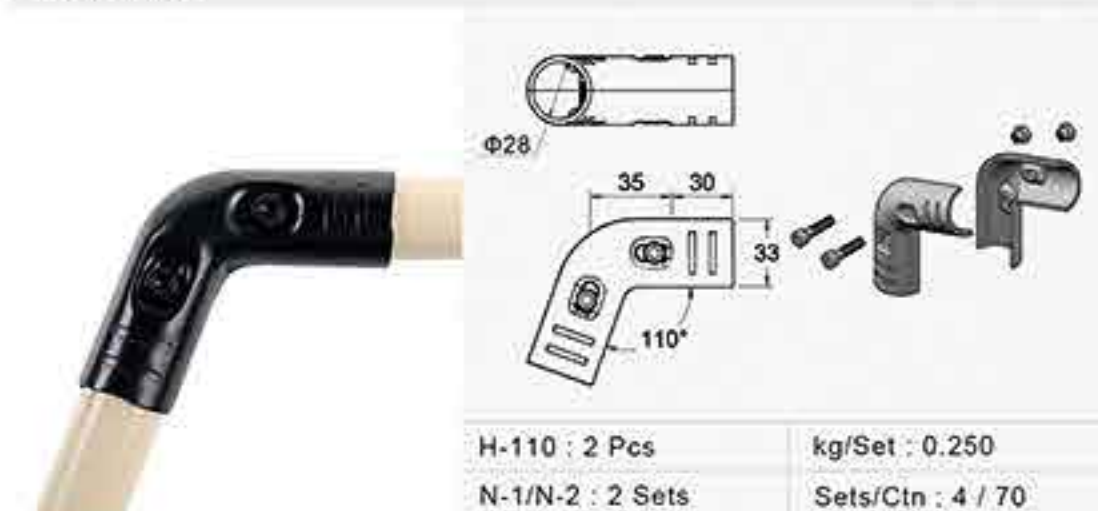

HJ-160

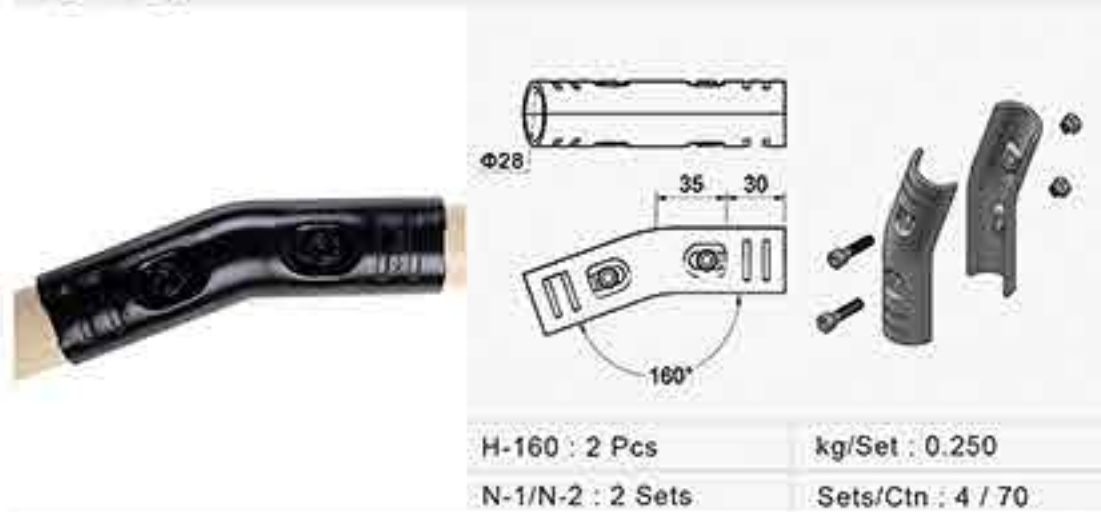

HJ-180




METAL JOINTS (Φ33)

SURFACE : ●BK ●WZ ●NP ○CP ●PC

HJ-103




HJ-403

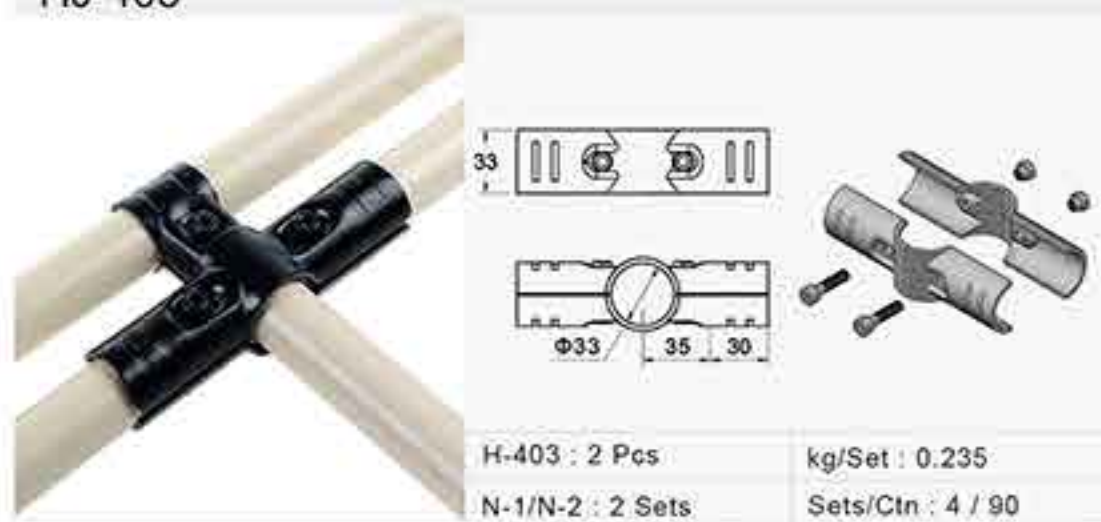

HJ-13C



HJ-13D

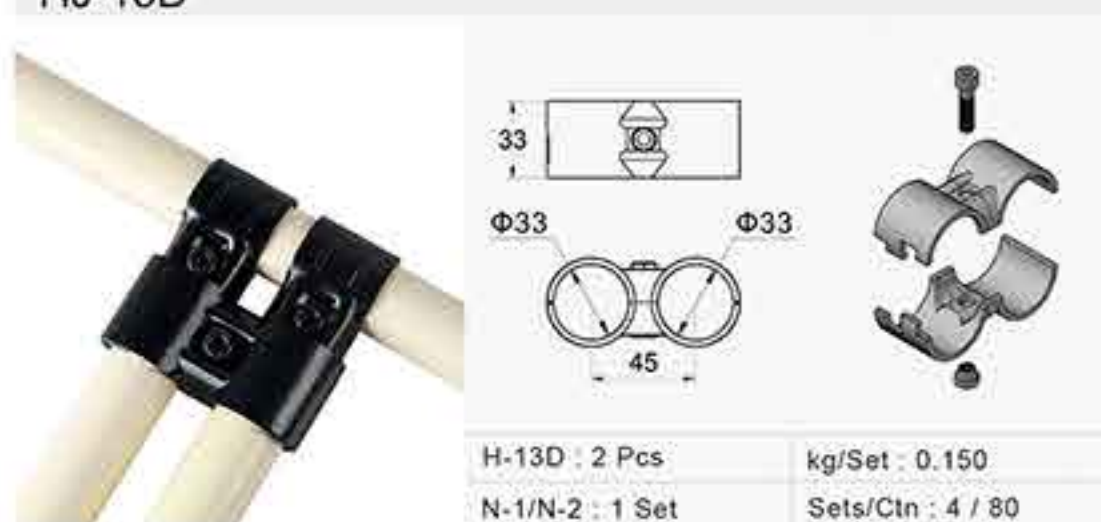


METAL JOINTS (Φ28.6)

HJ-101




HJ-102

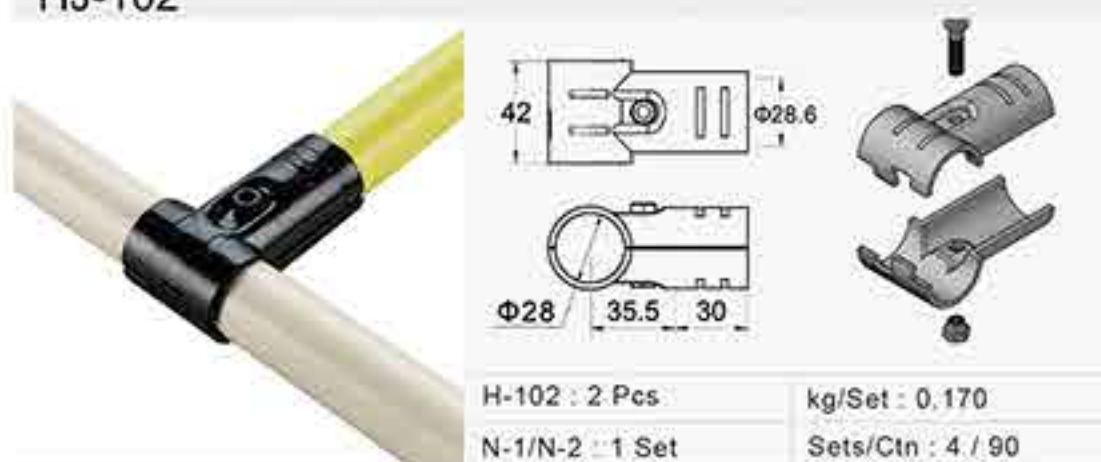


HJ-201



HJ-301

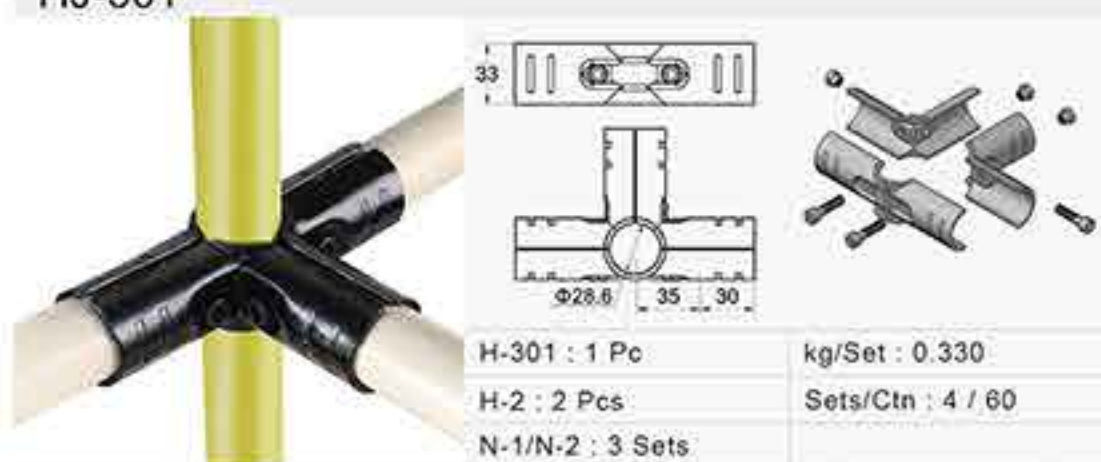


HJ-401

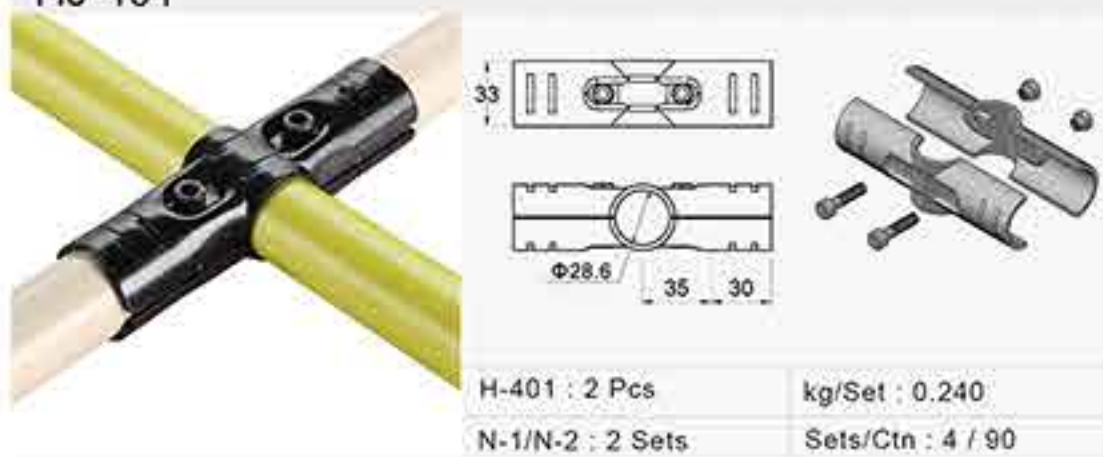

H Series

METAL JOINTS

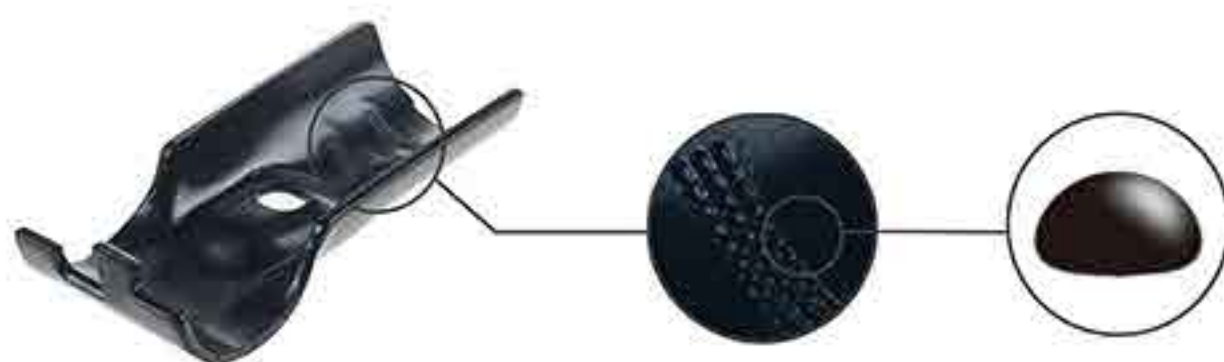

METAL JOINTS



SURFACE : ●BK ●WZ ●NP ○CP ●PC

H-1



kg/Pc	0.067
Pc/Ctn	300

H-1A



kg/Pc	0.058
Pc/Ctn	360

H-2



kg/Pc	0.094
Pc/Ctn	200

H-3 (Ungrip Type)



kg/Pc	0.120
Pc/Ctn	80

H-3K (Grip Type)



kg/Pc	0.120
Pc/Ctn	80

H-4



kg/Pc	0.106
Pc/Ctn	200

H-5



kg/Pc	0.045
Pc/Ctn	300

H-6



kg/Pc	0.059
Pc/Ctn	300

H-6A



kg/Pc	0.066
Pc/Ctn	240

H-7



kg/Pc	0.048
Pc/Ctn	200

H-7A



kg/Pc	0.040
Pc/Ctn	300

H-8



kg/Pc	0.067
Pc/Ctn	240

H-9



kg/Pc	0.062
Pc/Ctn	330

H-10



kg/Pc	0.054
Pc/Ctn	300

H-11



kg/Pc	0.060
Pc/Ctn	280

H-12



kg/Pc	0.063
Pc/Ctn	240

H-13



kg/Pc	0.053
Pc/Ctn	300

H-13A



kg/Pc	0.052
Pc/Ctn	330

H-13B



kg/Pc	0.044
Pc/Ctn	540

H-14



kg/Pc	0.056
Pc/Ctn	320

H-15



kg/Pc	0.038
Pc/Ctn	400

H-16



kg/Pc	0.046
Pc/Ctn	400

H-16A



kg/Pc	0.046
Pc/Ctn	400

H-17



kg/Pc	0.069
Pc/Ctn	220

H-18



kg/Pc	0.069
Pc/Ctn	220

H-19



kg/Pc	0.062
Pc/Ctn	200

H-20



kg/Pc	0.070
Pc/Ctn	200

H-21



kg/Pc	0.133
Pc/Ctn	150

H-23



kg/Pc	0.064
Pc/Ctn	180

H-24



kg/Pc	0.102
Pc/Ctn	200

H-30



kg/Pc	0.062
Pc/Ctn	330

H-45



kg/Pc	0.066
Pc/Ctn	230

H-60



kg/Pc	0.083
Pc/Ctn	150

H-90



kg/Pc	0.102
Pc/Ctn	150

H-110



kg/Pc	0.113
Pc/Ctn	150

H-160



kg/Pc	0.114
Pc/Ctn	160

H-180



kg/Pc	0.071
Pc/Ctn	300

METAL JOINTS (Φ33)

SURFACE : ●BK ●WZ ●NP ○CP ●PC

H-103



kg/Pc	0.073
Pc/Ctn	240

H-403



kg/Pc	0.106
Pc/Ctn	200

H-13C



kg/Pc	0.069
Pc/Ctn	180

H-13D



kg/Pc	0.068
Pc/Ctn	180

METAL JOINTS (Φ28.6)

H-101



kg/Pc	0.078
Pc/Ctn	200

H-102



kg/Pc	0.078
Pc/Ctn	200

H-301



kg/Pc	0.120
Pc/Ctn	80

H-401



kg/Pc	0.108
Pc/Ctn	200

METAL JOINTS (T 2.3)

H-1



kg/Pc	0.061
Pc/Ctn	300

H-2



kg/Pc	0.086
Pc/Ctn	200

H-3 (Ungrip Type)



kg/Pc	0.111
Pc/Ctn	80

H-4



kg/Pc	0.098
Pc/Ctn	200

H-5



kg/Pc	0.042
Pc/Ctn	300

H-6



kg/Pc	0.055
Pc/Ctn	300

H-13A



kg/Pc	0.050
Pc/Ctn	330

H-15



kg/Pc	0.032
Pc/Ctn	400

H-16



kg/Pc	0.042
Pc/Ctn	400

H-17



kg/Pc	0.065
Pc/Ctn	220

H-18



kg/Pc	0.065
Pc/Ctn	220

H-90



kg/Pc	0.095
Pc/Ctn	150

H Series

METAL JOINTS (T 2.3 NEW)

H-1



kg/Pc	0.061
Pc/Ctn	300

H-2



kg/Pc	0.086
Pc/Ctn	200

H-3



kg/Pc	0.111
Pc/Ctn	80



R Series ROLLER TRACKS

R-4036


— Shaft Distance

— Roller Track Width

ROLLER TRACKS


SURFACE : ● BK ○ WZ

R-3533

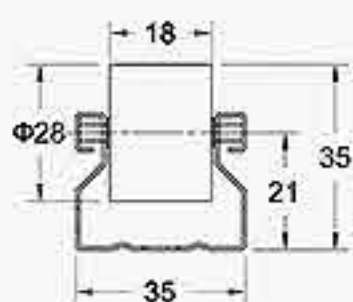


kg/m	0.830
m/Pc	4
m/Bdl	40

R-4036

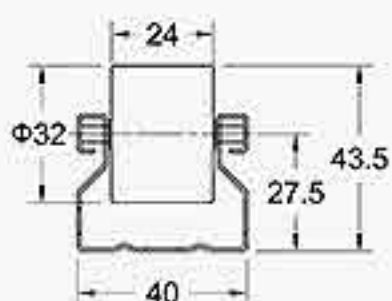


kg/m	1.100
m/Pc	3.99
m/Bdl	39.9

R-S4036

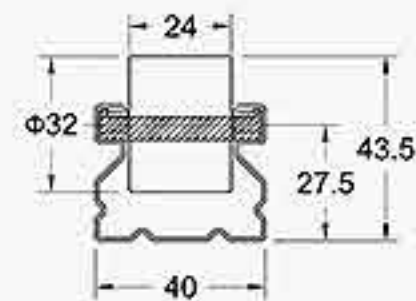


kg/m	1.100
m/Pc	4
m/Bdl	40

R-4036A

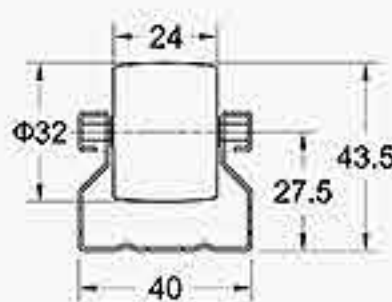


kg/m	1.100
m/Pc	3.99
m/Bdl	39.9

R-S4036A

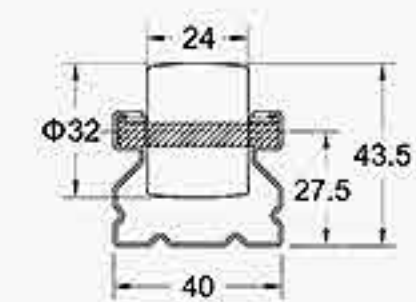



kg/m	1.100
m/Pc	4
m/Bdl	40

R-40225

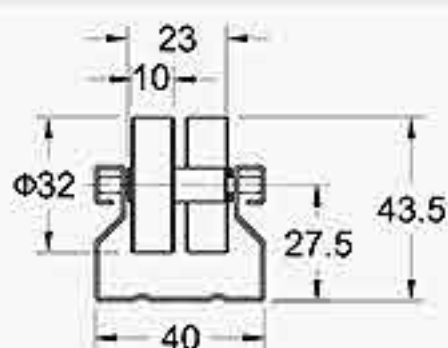


kg/m	1.100
m/Pc	4
m/Bdl	40

R-4045A

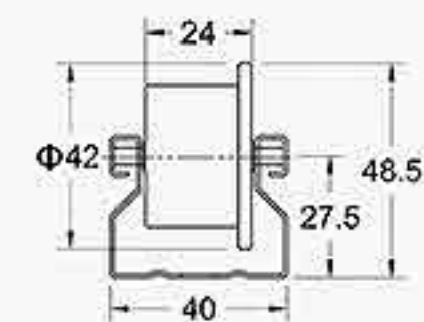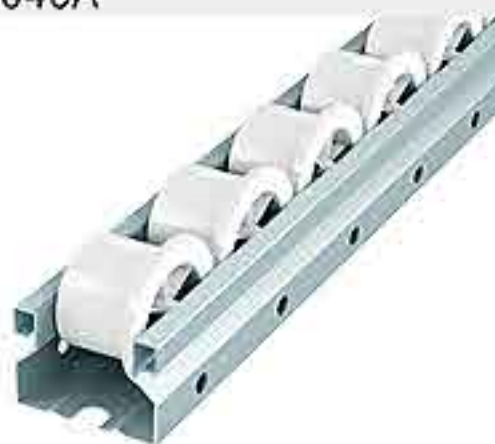


kg/m	1.100
m/Pc	4
m/Bdl	40

R-4045B

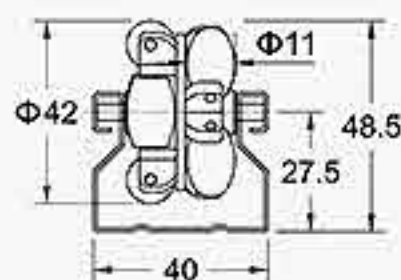


kg/m	1.100
m/Pc	4
m/Bdl	40

R-6016

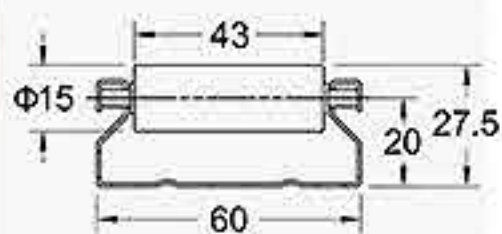


kg/m	1.450
m/Pc	4
m/Bdl	24

R-6032

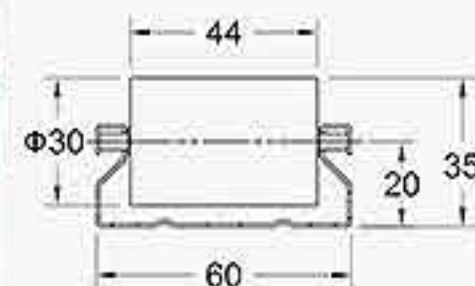


kg/m	1.450
m/Pc	4
m/Bdl	24

R-8040

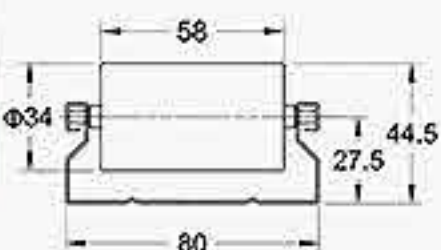


kg/m	1.620
m/Pc	4
m/Bdl	16

R-S8040

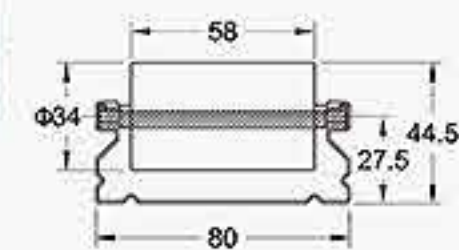


kg/m	1.620
m/Pc	4
m/Bdl	16

R-8519

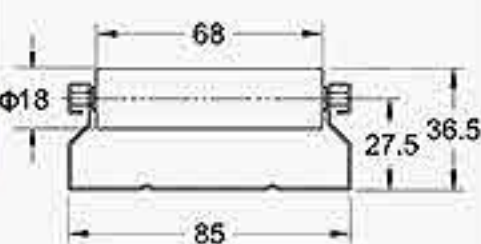


kg/m	2.000
m/Pc	4
m/Bdl	16

R-S8520

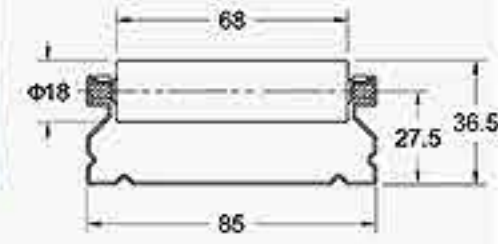


kg/m	2.000
m/Pc	4
m/Bdl	16

R-8525

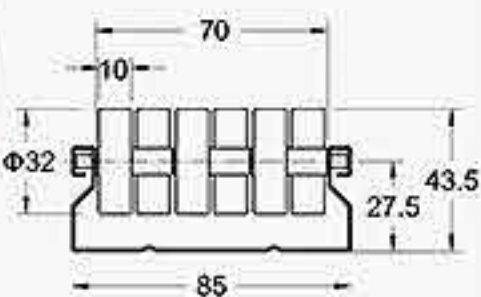

kg/m	1.650
m/Pc	4
m/Bdl	16

R-8550

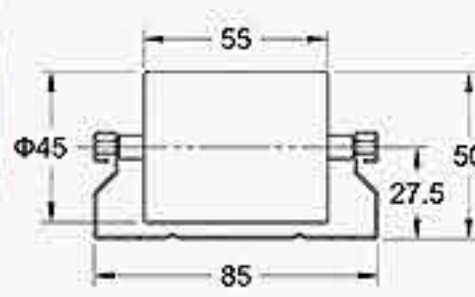


kg/m	1.650
m/Pc	4
m/Bdl	16

ROLLER TRACKS (R-28H)


SURFACE : ●BK ○WZ

R-28H1

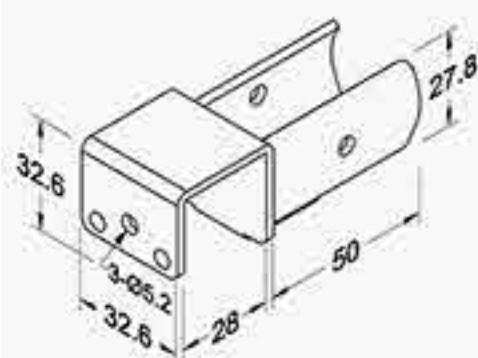


kg/Pc	0.128
Pc/Ctn	95

R-28H2

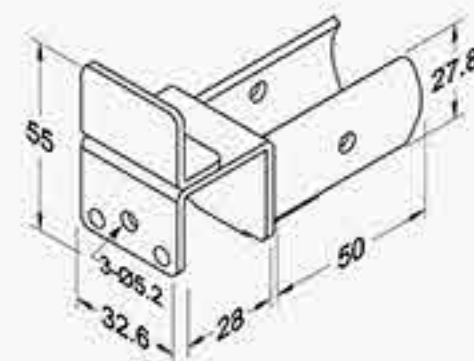


kg/Pc	0.150
Pc/Ctn	85

R-28H3

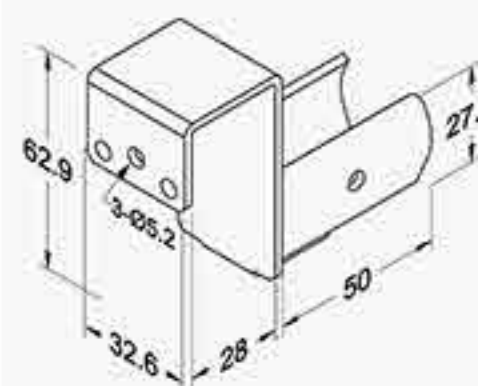


kg/Pc	0.153
Pc/Ctn	80

R-28H4B

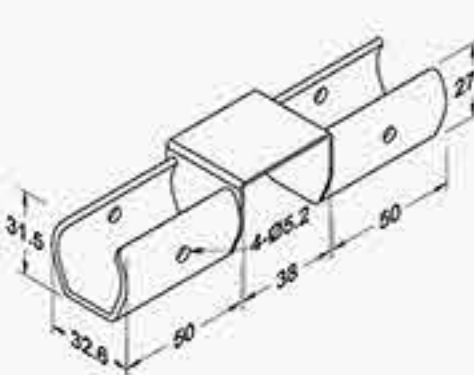


kg/Pc	0.171
Pc/Ctn	50

R-28H5

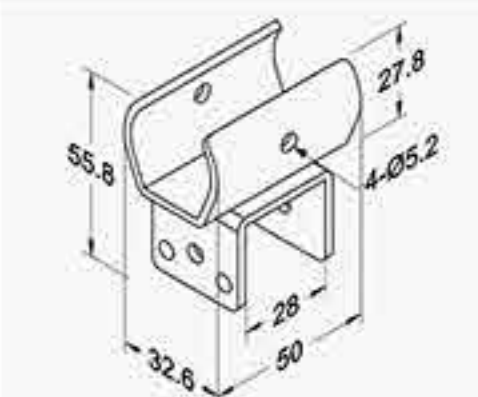

kg/Pc	0.112
Pc/Ctn	110


R-28H5B

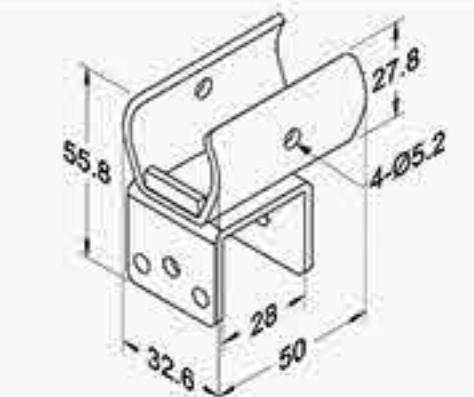

kg/Pc	0.117
Pc/Ctn	110


ROLLER TRACKS (R-35H)

R-35H1

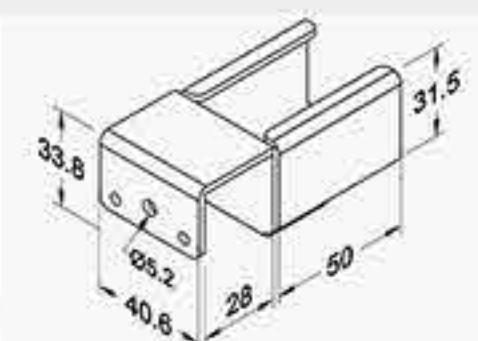


kg/Pc	0.167
Pc/Ctn	70

R-35H2

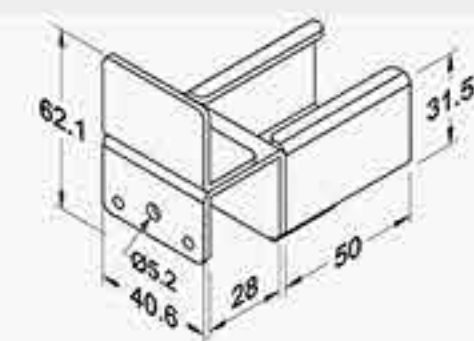


kg/Pc	0.211
Pc/Ctn	45

R-35H3A

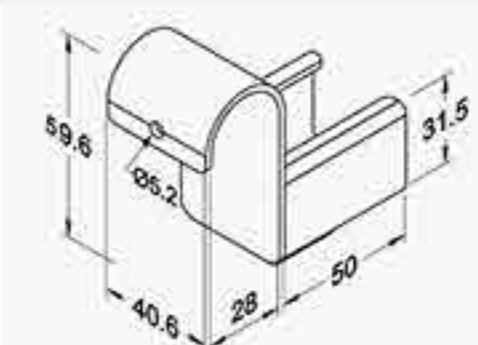

kg/Pc	0.191
Pc/Ctn	55


R-35H5

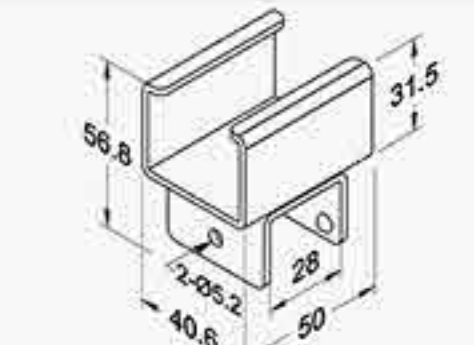

kg/Pc	0.137
Pc/Ctn	90


ROLLER TRACKS (R-40H)

R-40BH1

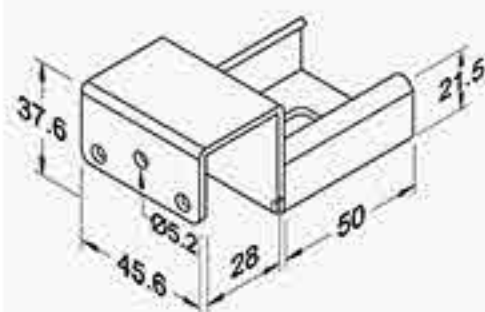


kg/Pc	0.141
Pc/Ctn	65

R-40BH2

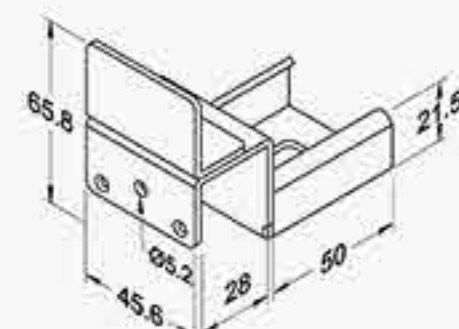


kg/Pc	0.193
Pc/Ctn	60

R-40BH3

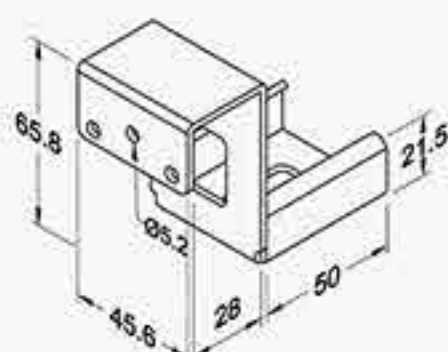


kg/Pc	0.167
Pc/Ctn	60

R-40BH4

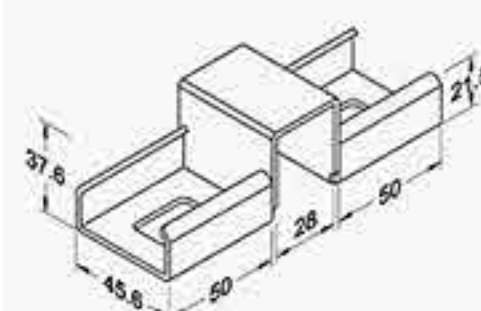


kg/Pc	0.270
Pc/Ctn	35

R-40BH5




kg/Pc	0.120
Pc/Ctn	160

R-40BH6

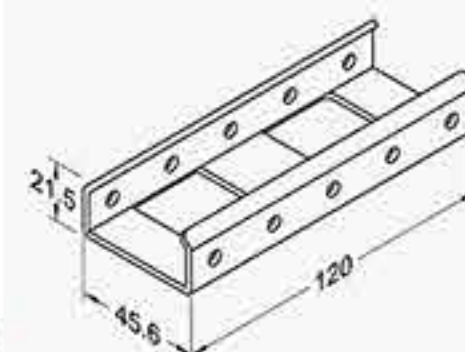


kg/Pc	0.180
Pc/Ctn	110

R-40BH6A

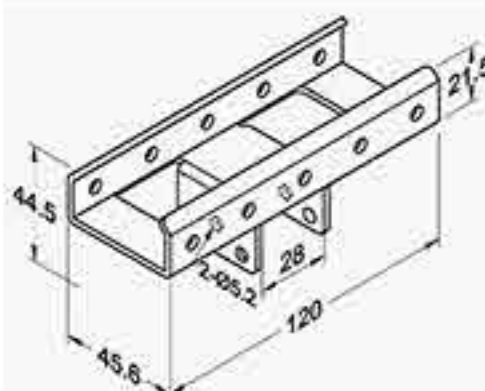


kg/Pc	0.230
Pc/Ctn	50

R-40BH31

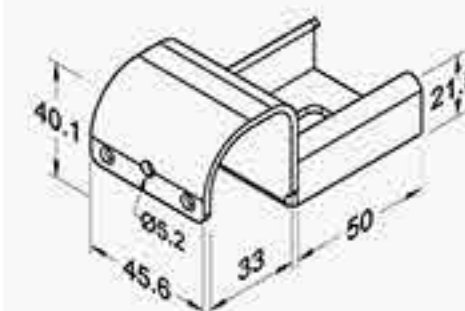

kg/Pc	0.180
Pc/Ctn	80

R-40BH33

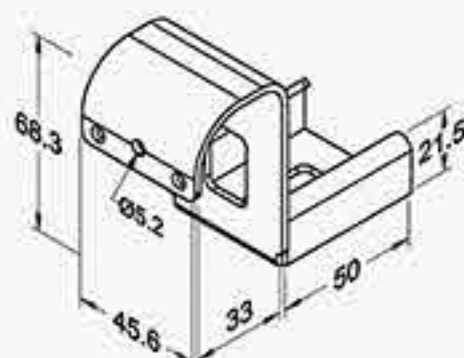


kg/Pc	0.230
Pc/Ctn	65

ROLLER TRACKS (R-40H)


SURFACE : ● BK ○ WZ

R-40H1

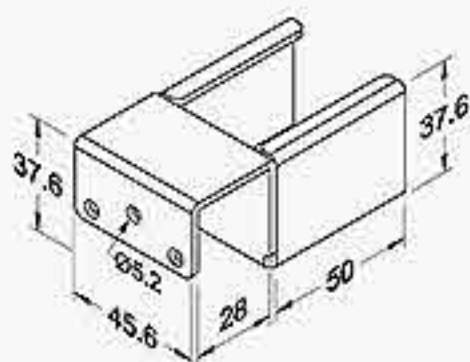


kg/Pc	0.182
Pc/Ctn	45

R-40H2

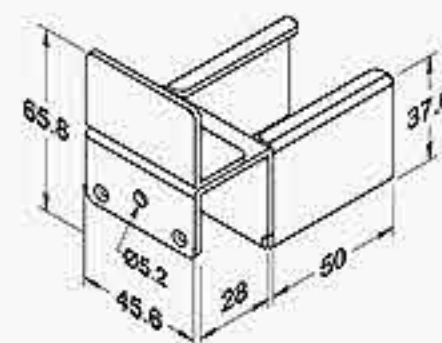


kg/Pc	0.234
Pc/Ctn	45

R-40H3

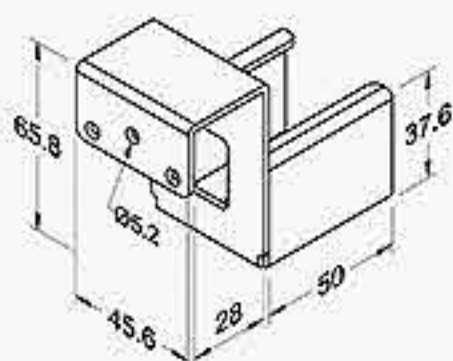


kg/Pc	0.208
Pc/Ctn	40

R-40H6

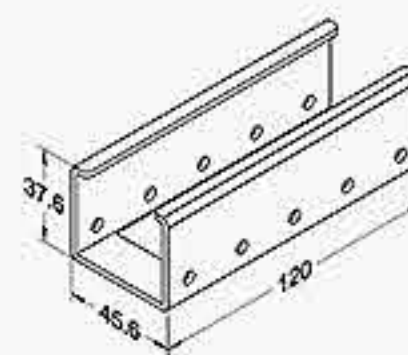

kg/Pc	0.272
Pc/Ctn	50


R-40H6A

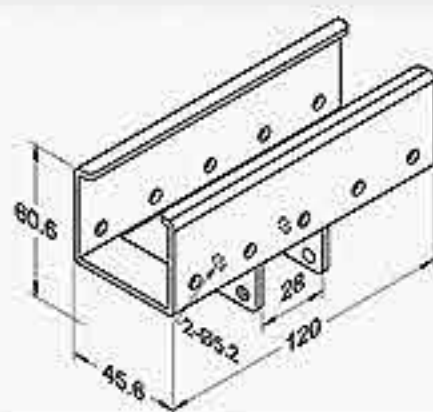

kg/Pc	0.320
Pc/Ctn	20


ROLLER TRACKS (RP-40)

RP-40A

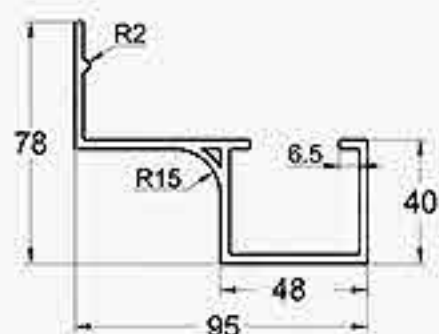


kg/m	0.980
m/Pc	4
m/Bdl	40

RP-40B

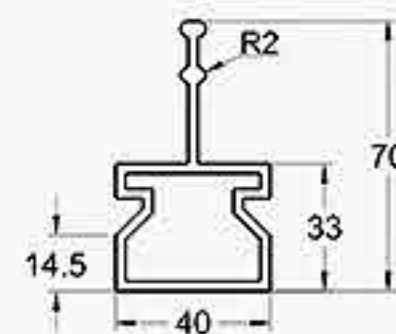


kg/m	0.660
m/Pc	4
m/Bdl	40

RP-40C




kg/m	0.980
m/Pc	4
m/Bdl	40

RP-40D



Kg/Pc	4
Pc/Ctn	40

RP-5030ESD2440

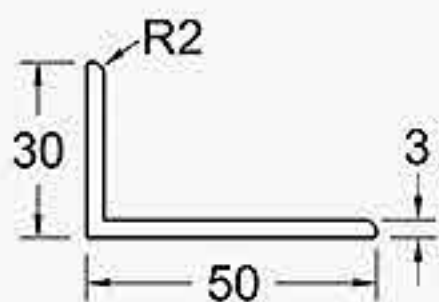


kg/m	0.400
m/Pc	2.44
m/Bdl	48.8

ROLLER TRACKS (ODM)


SURFACE : ●BK ○WZ

R-40BH2B

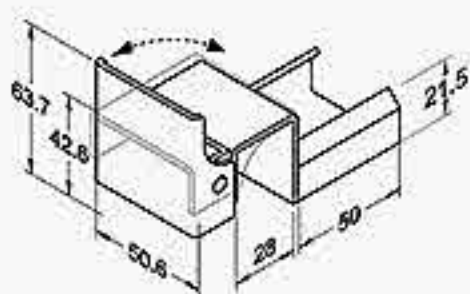



kg/Pc 0.167
Pc/Ctn 50

R-40BH4A

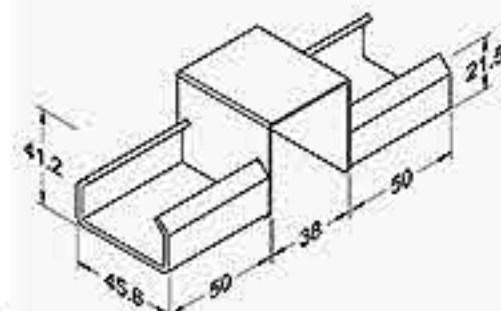


kg/Pc 0.213
Pc/Ctn 30

R-40BH4B

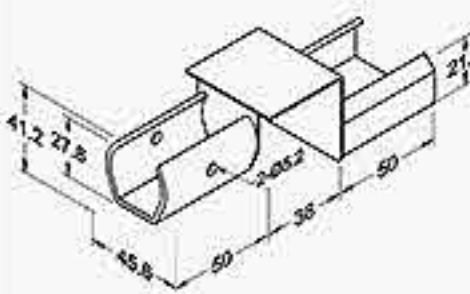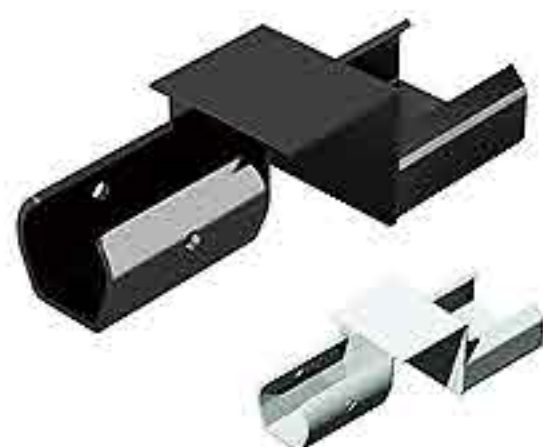


kg/Pc 0.190
Pc/Ctn 40

R-40H2A

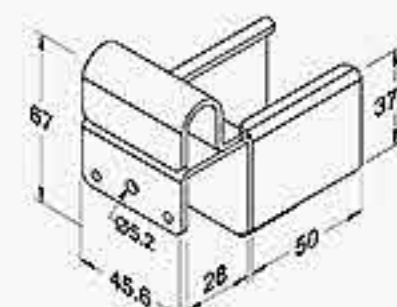


kg/Pc 0.234
Pc/Ctn 45

R-40H4A

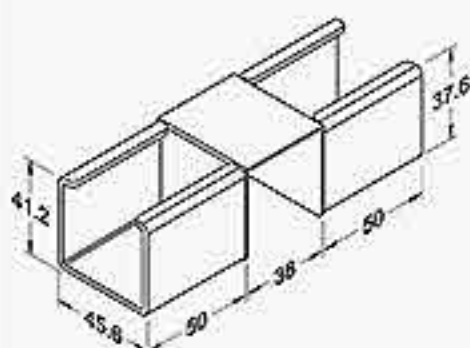


kg/Pc 0.290
Pc/Ctn 30

R-4040H1

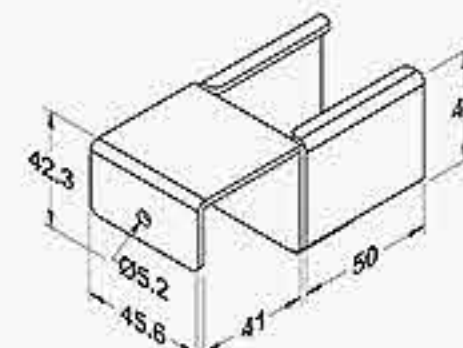


kg/Pc 0.220
Pc/Ctn 45

R-4040H3

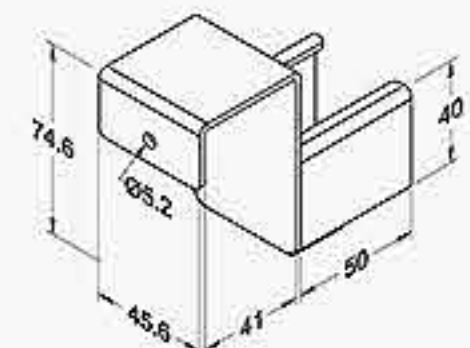


kg/Pc 0.250
Pc/Ctn 35

R-44H1

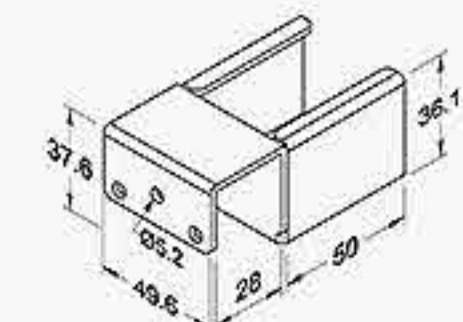


kg/Pc 0.186
Pc/Ctn 40

R-44H3

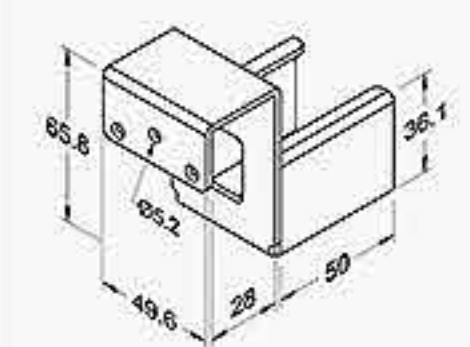

kg/Pc 0.220
Pc/Ctn 35


R-85H2A

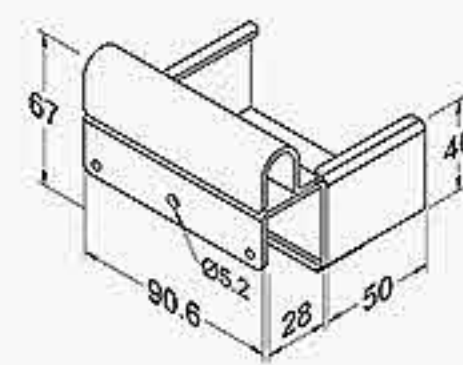

kg/Pc 0.405
Pc/Ctn 20



ROLLER TRACKS (R-60H)

R-60BH1

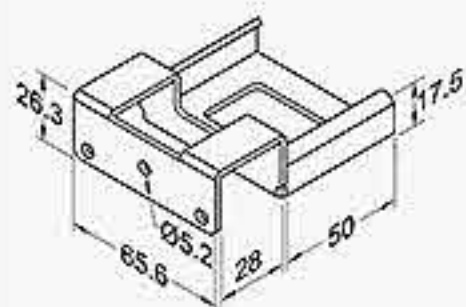


kg/Pc	0.220
Pc/Ctn	50

R-60BH2

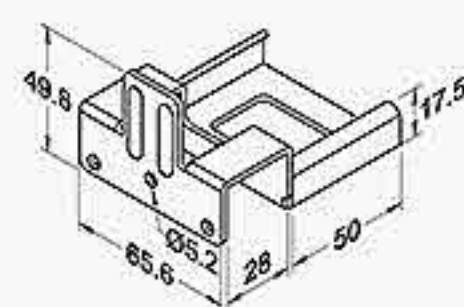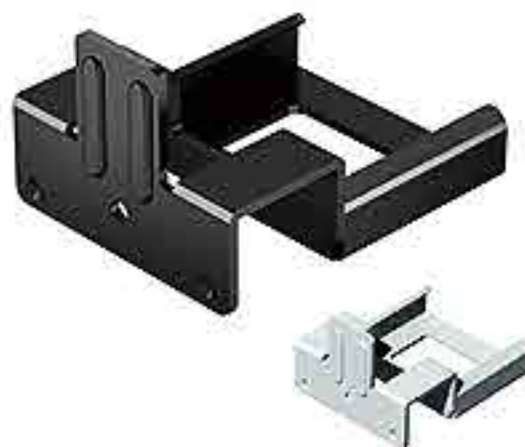



kg/Pc	0.300
Pc/Ctn	45

R-60BH3

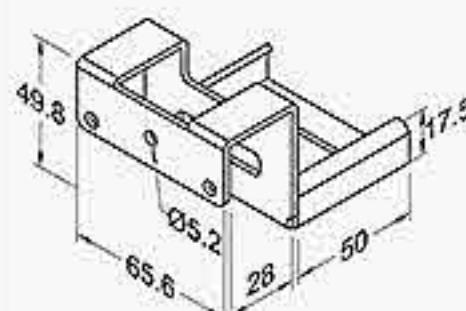


kg/Pc	0.240
Pc/Ctn	45

R-60BH4

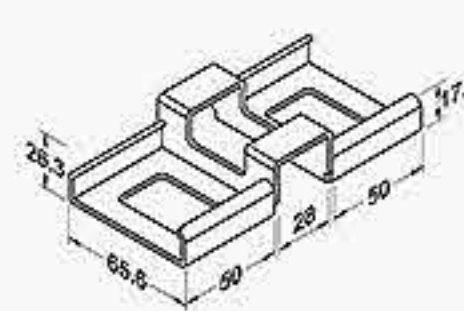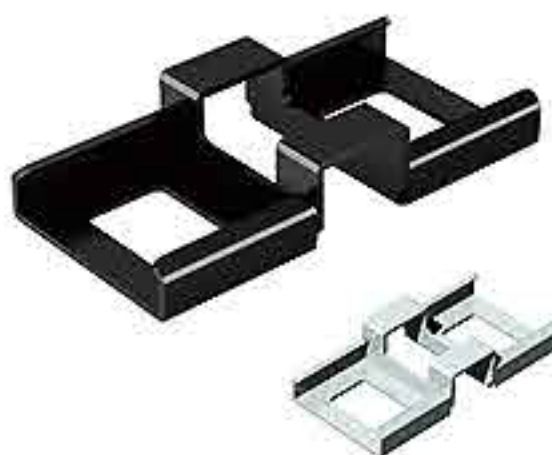


kg/Pc	0.263
Pc/Ctn	35

R-60BH5

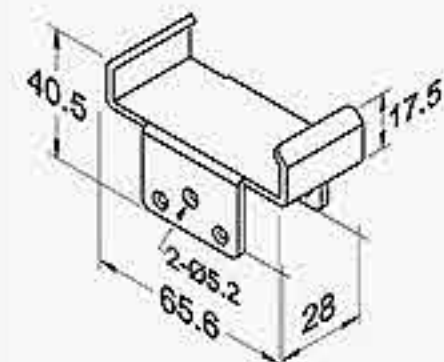


kg/Pc	0.140
Pc/Ctn	140

R-60BH6

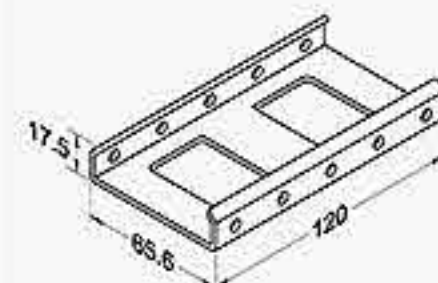


kg/Pc	0.215
Pc/Ctn	80

R-60BH6A

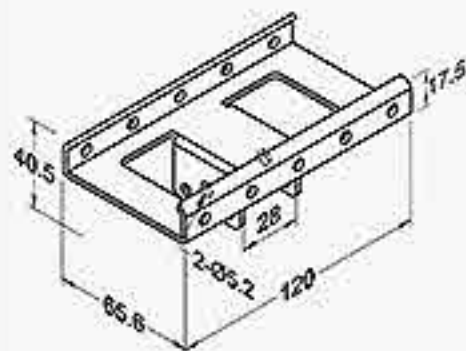


kg/Pc	0.267
Pc/Ctn	30

R-60BH31

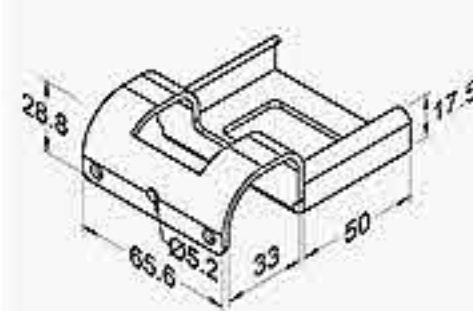

kg/Pc	0.267
Pc/Ctn	65

R-60BH33

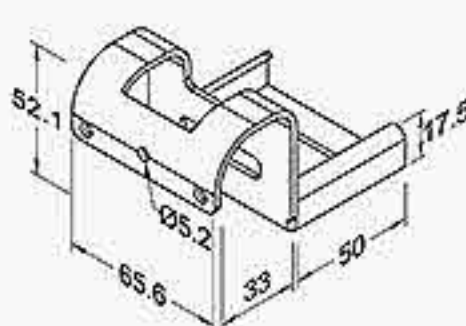


kg/Pc	0.267
Pc/Ctn	45

ROLLER TRACKS (R-80H)



SURFACE : ●BK ○WZ

R-80BH1

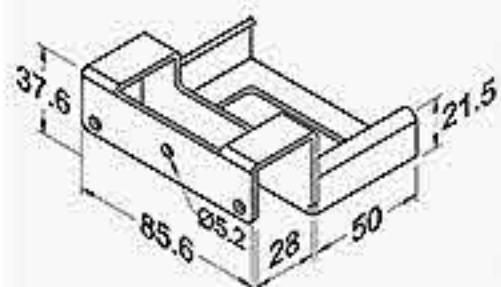


kg/Pc	0.220
Pc/Ctn	35

R-80BH2

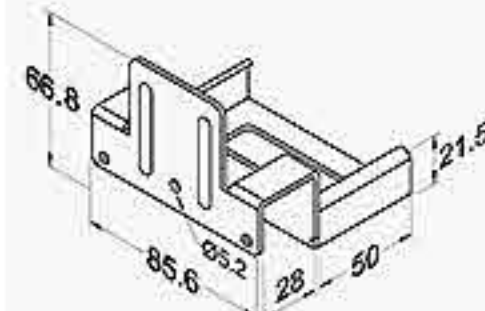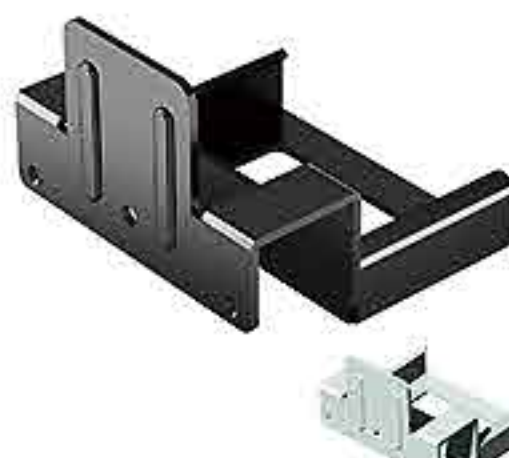



kg/Pc	0.300
Pc/Ctn	35

R-80BH3

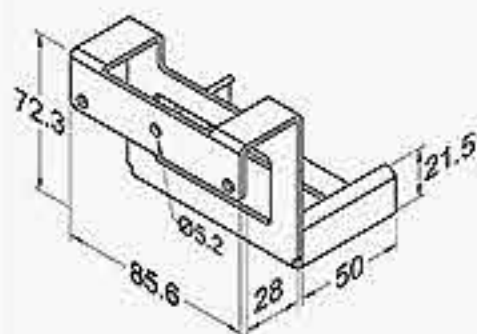


kg/Pc	0.240
Pc/Ctn	30

R-80BH4

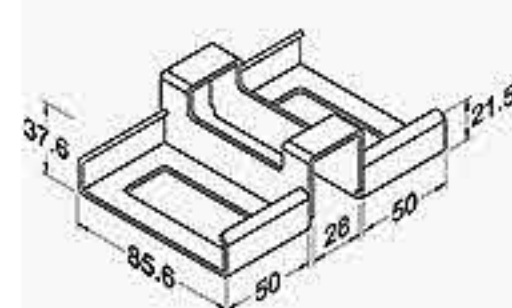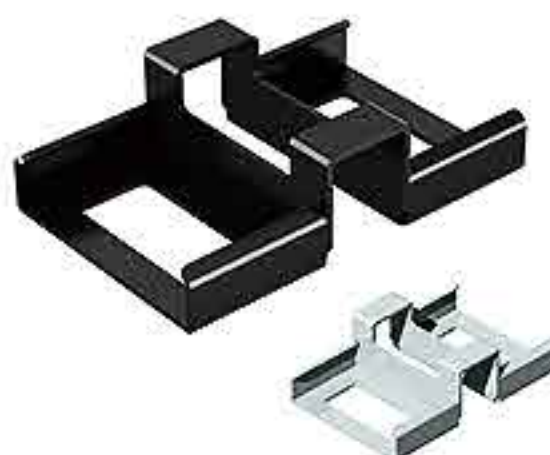


kg/Pc	0.263
Pc/Ctn	20

R-80BH5

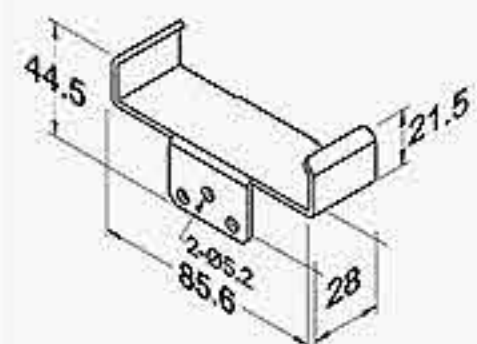


kg/Pc	0.140
Pc/Ctn	50

R-80BH6

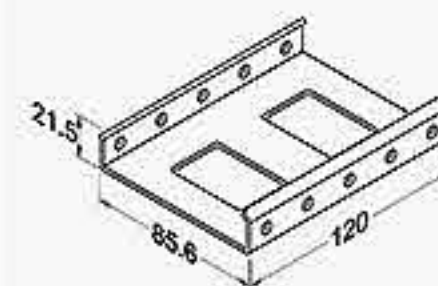


kg/Pc	0.215
Pc/Ctn	55

R-80BH6A

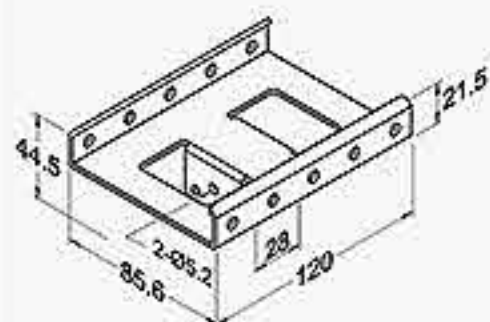


kg/Pc	0.267
Pc/Ctn	20

R-80BH31

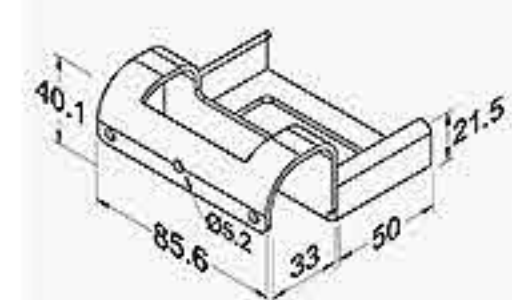

kg/Pc	0.267
Pc/Ctn	35


R-80BH33

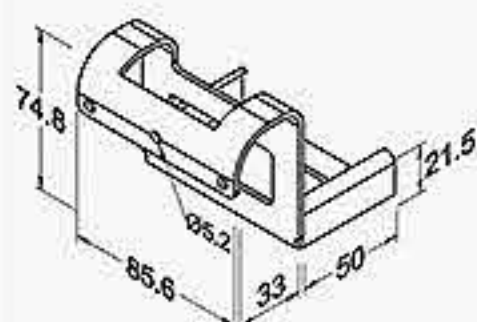

kg/Pc	0.267
Pc/Ctn	30


ROLLER TRACKS (R-85H)

R-85BH1

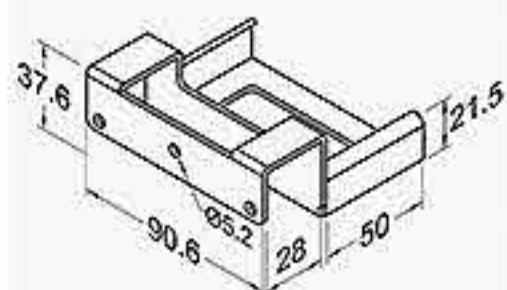


kg/Pc	0.220
Pc/Ctn	30

R-85BH2

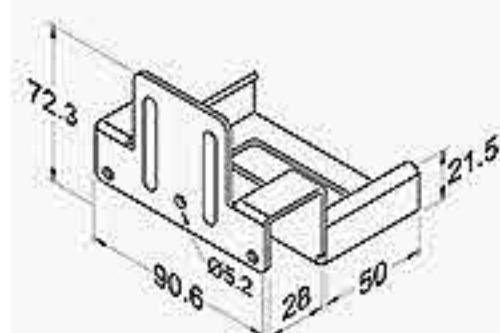



kg/Pc	0.300
Pc/Ctn	30

R-85BH3

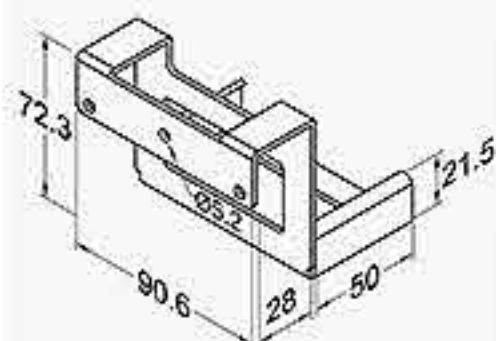


kg/Pc	0.240
Pc/Ctn	30

R-85BH4

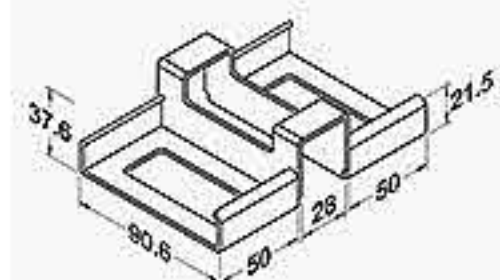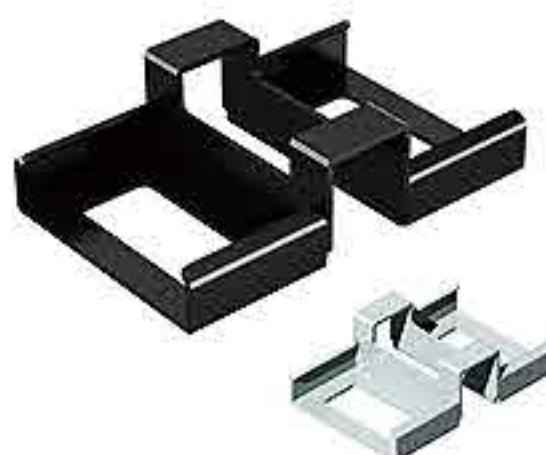


kg/Pc	0.263
Pc/Ctn	20

R-85BH5

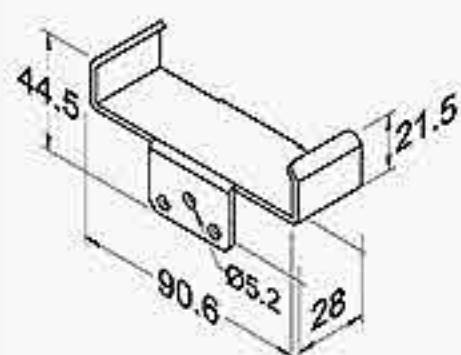


kg/Pc	0.140
Pc/Ctn	100

R-85BH6

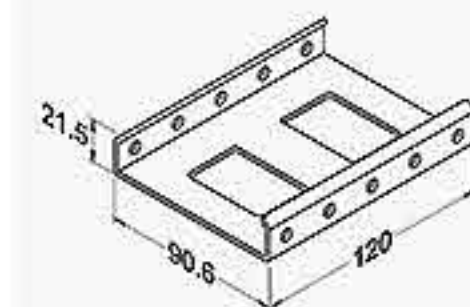


kg/Pc	0.215
Pc/Ctn	40

R-85BH6A

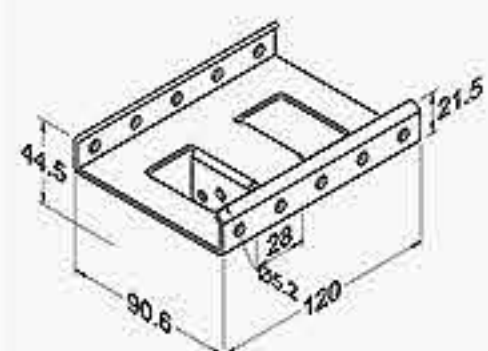


kg/Pc	0.267
Pc/Ctn	20

R-85BH31

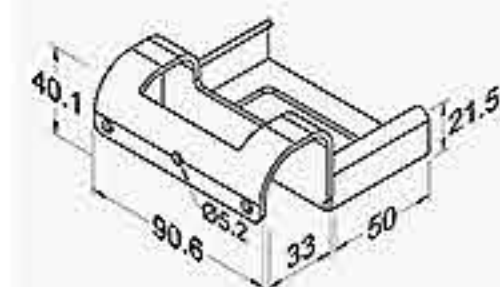

kg/Pc	0.267
Pc/Ctn	30

R-85BH33

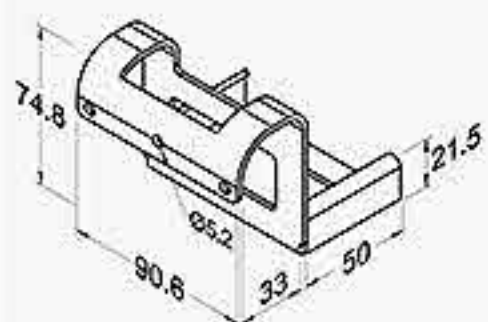


kg/Pc	0.267
Pc/Ctn	25

ROLLER TRACKS (R-85H)


SURFACE : ● BK ○ WZ

R-85H1

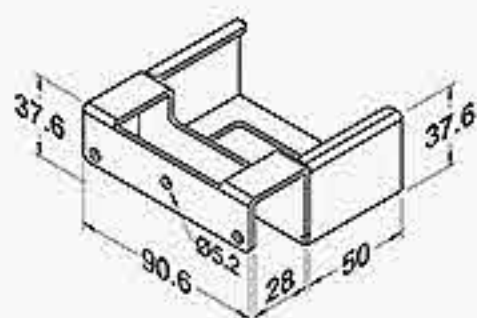


kg/Pc	0.220
Pc/Ctn	25

R-85H2

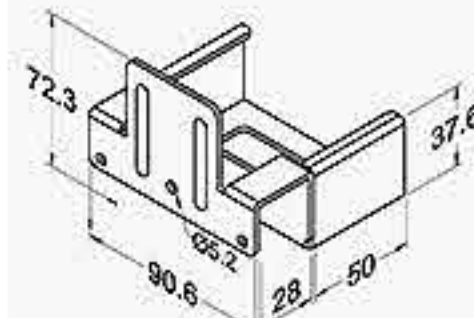


kg/Pc	0.300
Pc/Ctn	20

R-85H3

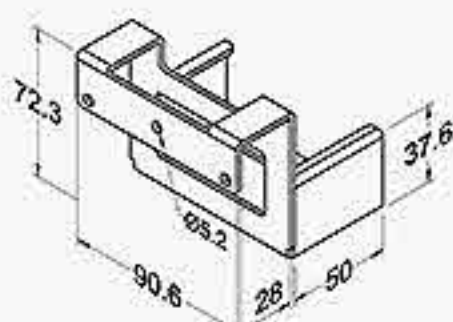


kg/Pc	0.240
Pc/Ctn	25

R-85H31

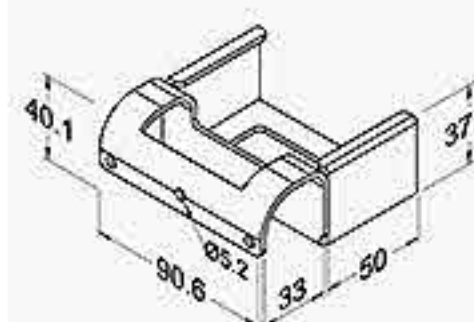

kg/Pc	0.300
Pc/Ctn	25

R-85H33

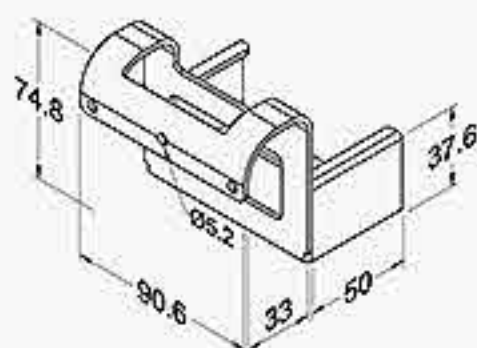


kg/Pc	0.240
Pc/Ctn	25

P Series
PLASTICS




PLASTICS

P-1

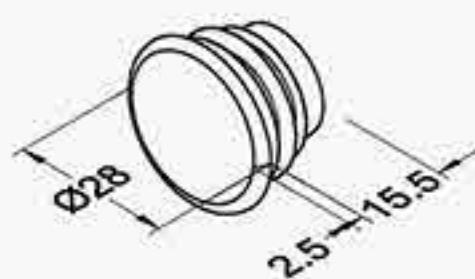

kg/Pc	0.003
Pc/Ctn	400

P-1A

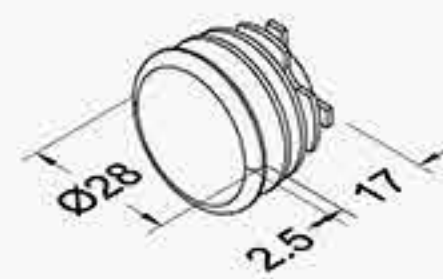


kg/Pc	0.003
Pc/Ctn	400

P-2



kg/Pc	0.009
Pc/Ctn	200

P-2A

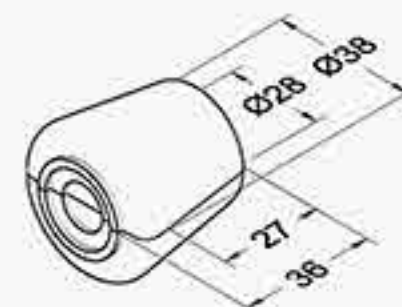


kg/Pc	0.017
Pc/Ctn	100

P-2B




kg/Pc	0.009
Pc/Ctn	200

P-3

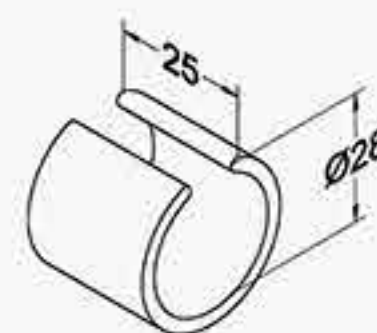


kg/Pc	0.005
Pc/Ctn	300

P-4

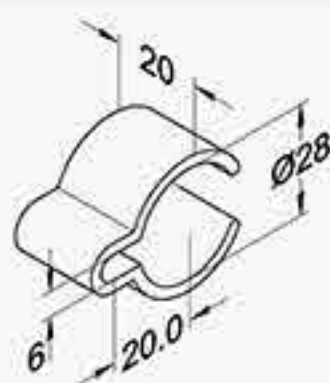


kg/Pc	0.005
Pc/Ctn	300

P-5




kg/Pc	0.003
Pc/Ctn	500

P-6

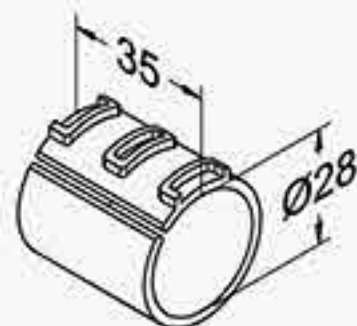

kg/Pc	0.006
Pc/Ctn	150


P-7



kg/Pc	0.010
Pc/Ctn	200


Unit : mm

P-7A

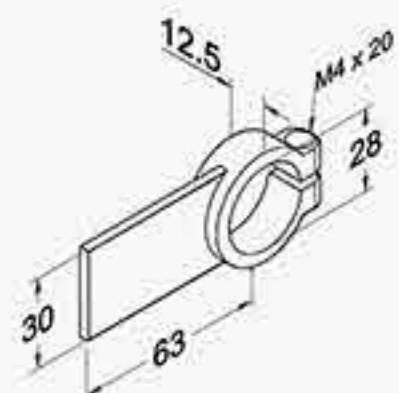


kg/Pc	0.012
Pc/Ctn	150

P-7B

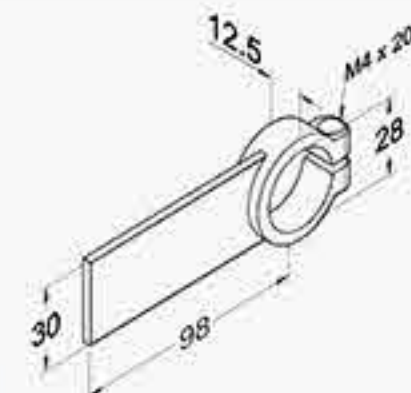


kg/Pc	0.013
Pc/Ctn	100

P-8

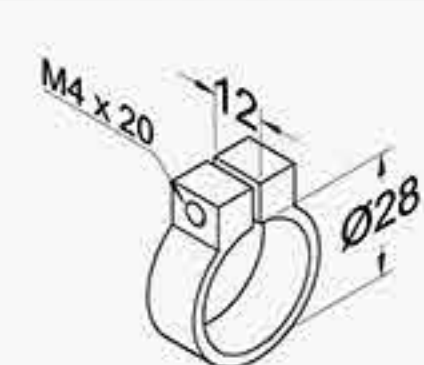


kg/Pc	0.005
Pc/Ctn	300

P-9

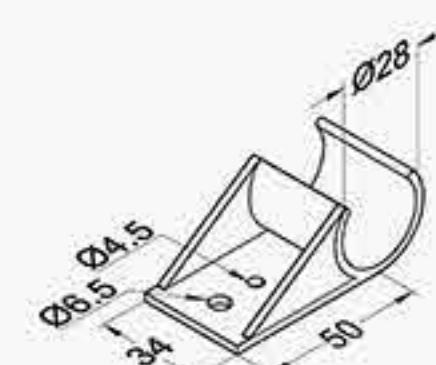


kg/Pc	0.014
Pc/Ctn	100

P-10

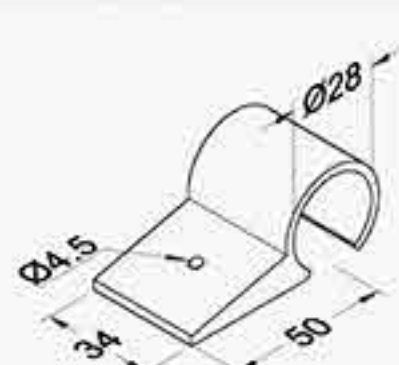


kg/Pc	0.014
Pc/Ctn	100

P-11

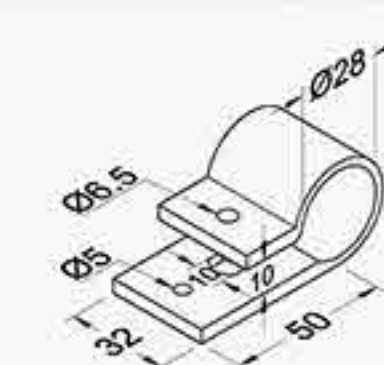


kg/Pc	0.018
Pc/Ctn	100

P-13

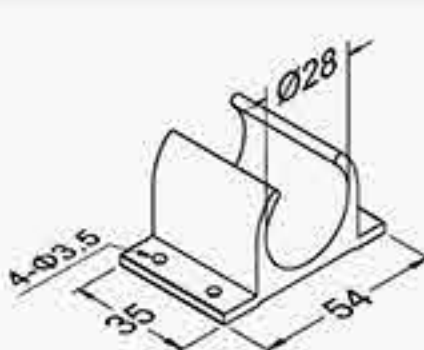


kg/Pc	0.014
Pc/Ctn	100

P-14

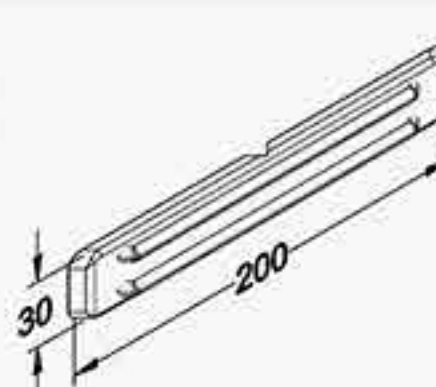


kg/Pc	0.042
Pc/Ctn	100

P-15

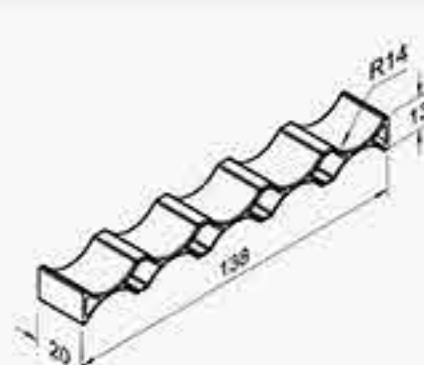

kg/Pc	0.008
Pc/Ctn	000


P-15A

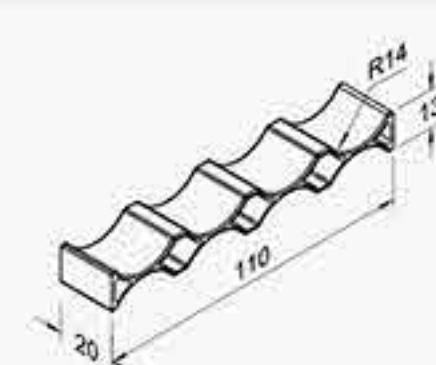

kg/Pc	0.007
Pc/Ctn	000


PLASTICS

P-L1




kg/Pc	0.040
Pc/Ctn	60

P-L1A




kg/Pc	0.053
Pc/Ctn	50

P-L2




kg/Pc	0.014
Pc/Ctn	120

P-L2A

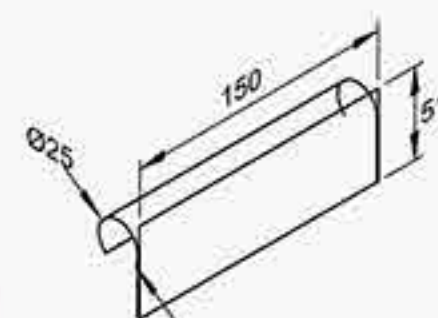


kg/Pc	0.022
Pc/Ctn	60

P-L2B




kg/Pc	0.013
Pc/Ctn	100

P-L2C

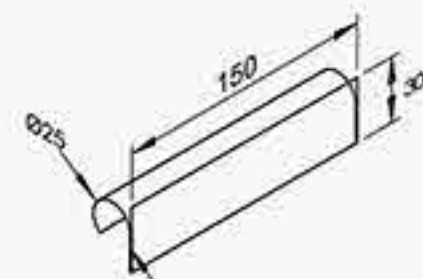


kg/Pc	0.020
Pc/Ctn	80

P-L2D

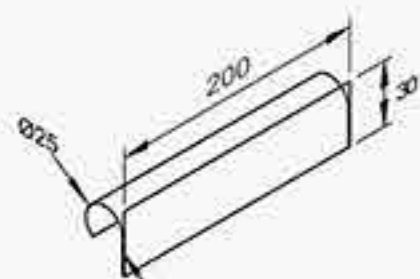


kg/Pc	0.026
Pc/Ctn	50

P-L3




kg/Pc	0.006
Pc/Ctn	1000

P-L3A



kg/Pc	0.009
Pc/Ctn	700


P-L3B

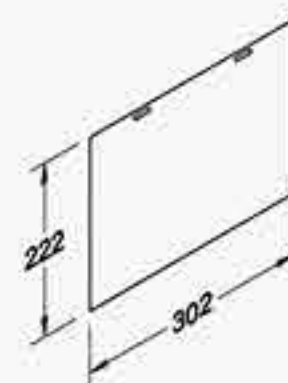

kg/Pc	0.088
Pc/Ctn	100


Unit : mm

P-L3C

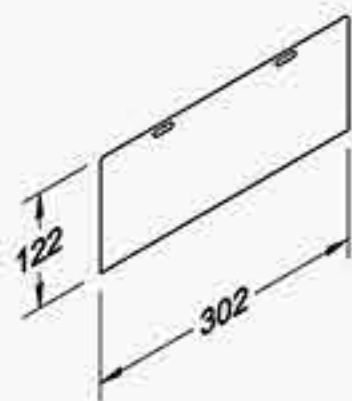


kg/Pc	0.045
Pc/Ctn	150

P-L3D

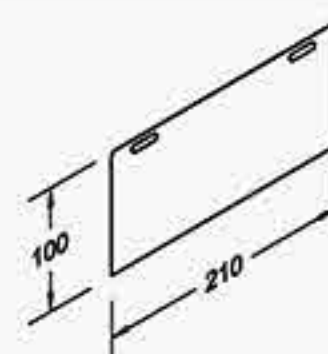


kg/Pc	0.029
Pc/Ctn	500

P-L4

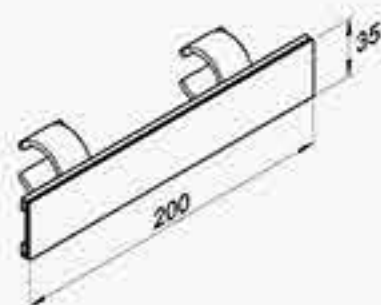


kg/Pc	0.045
Pc/Ctn	150

P-HJ2B

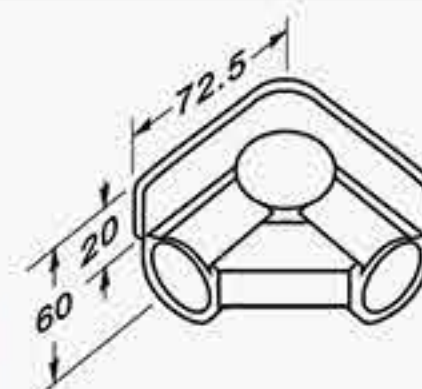





kg/Pc	0.057
Pc/Ctn	25

P-25

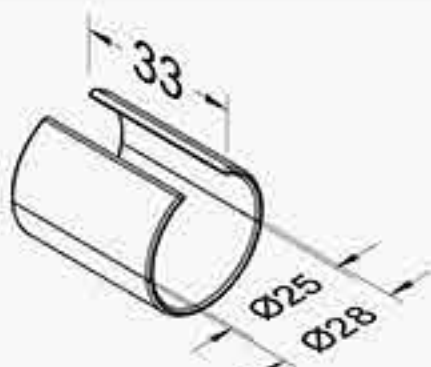

kg/Pc	0.006
Pc/Ctn	400

P-25 INSTRUCTIONS

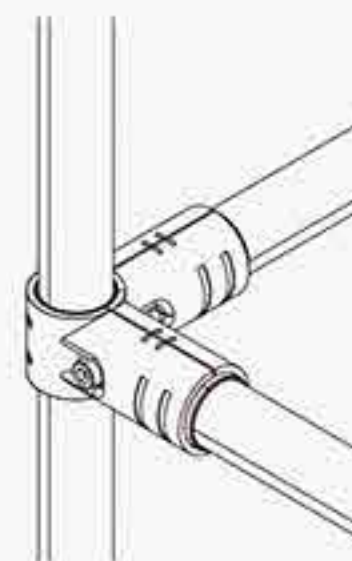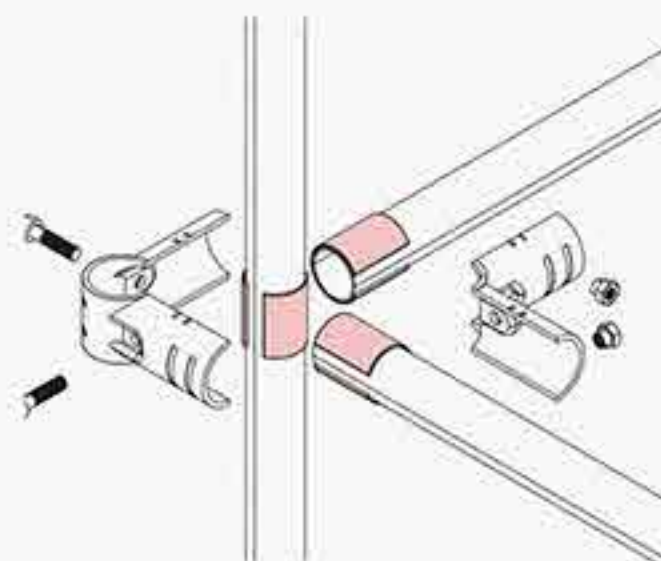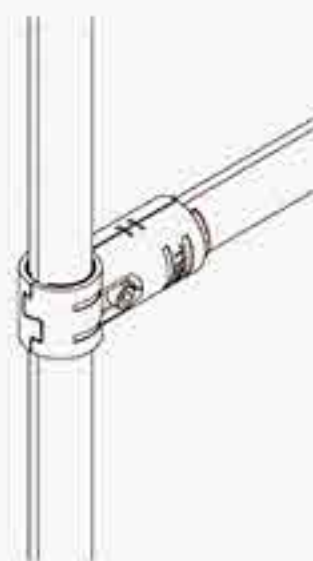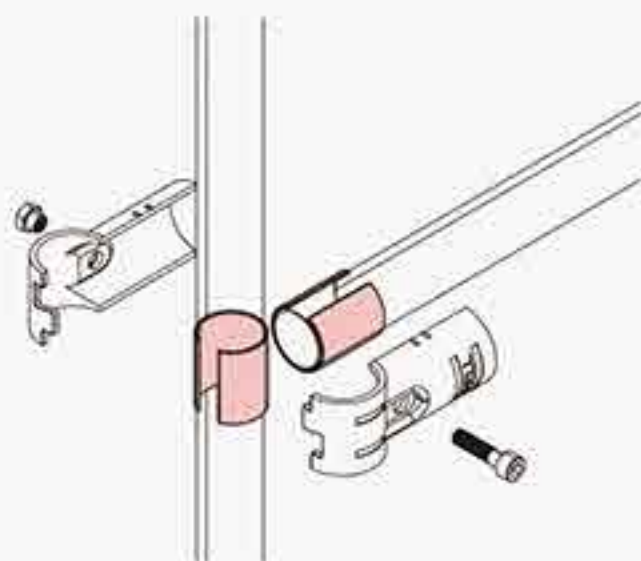



F Series


METAL ACCESSORIES

METAL ACCESSORIES




SURFACE : ●BK ●WZ

F-1

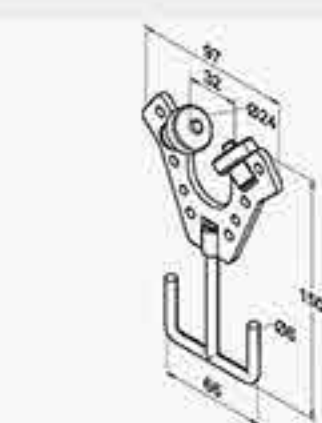


kg/Pc 0.158
Pc/Ctn 50

F-2

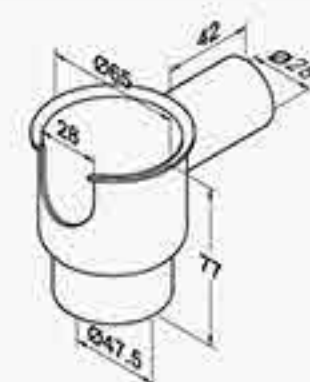


kg/Pc 0.200
Pc/Ctn 20

F-2A

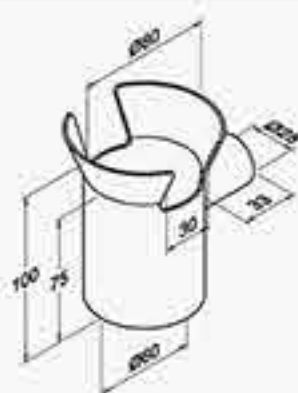


kg/Pc 0.250
Pc/Ctn 10

F-3

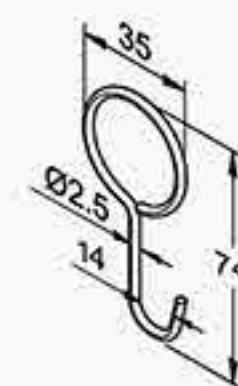


kg/Pc 0.006
Pc/Ctn 800

F-3A




kg/Pc 0.001
Pc/Ctn 10000

F-3B

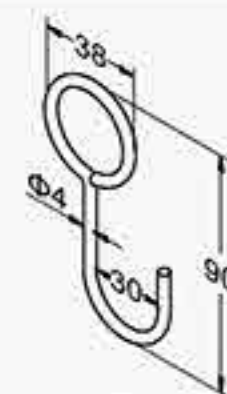


kg/Pc 0.020
Pc/Ctn 300

F-3C

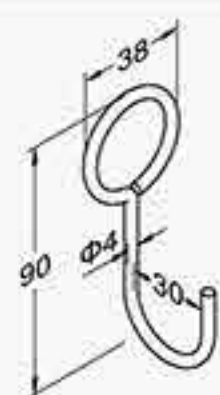


kg/Pc 0.020
Pc/Ctn 300

F-4

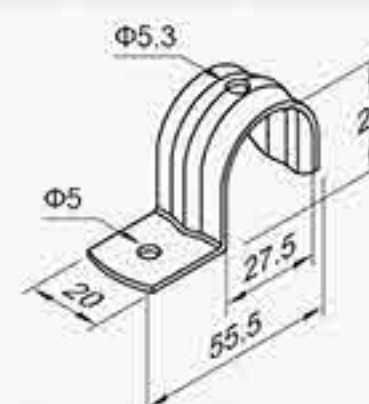


kg/Pc 0.020
Pc/Ctn 300

F-4A (Use with F-10/F-10A/F-21)

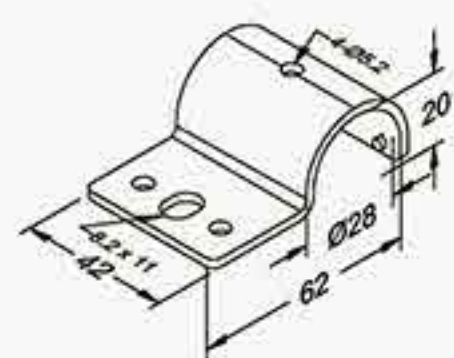

kg/Pc 0.070
Pc/Ctn 150


F-5

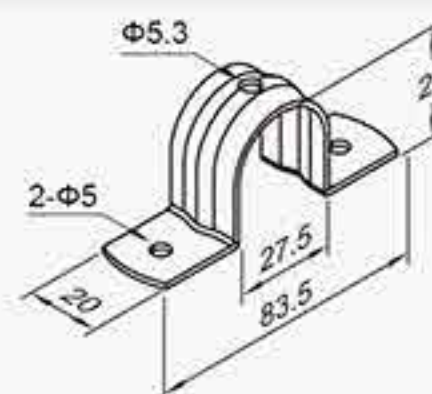

kg/Pc 0.026
Pc/Ctn 200


Unit : mm

F-6

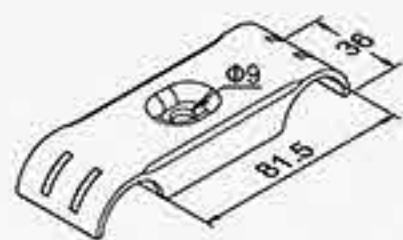


kg/Pc	0.104
Pc/Ctn	130

F-7

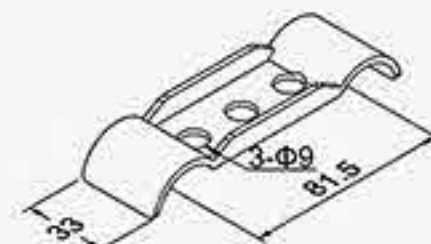


kg/Pc	0.079
Pc/Ctn	240

F-8

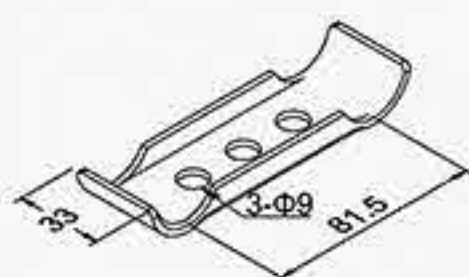


kg/Pc	0.082
Pc/Ctn	240

F-9




kg/Pc	0.013
Pc/Ctn	800

F-9A




kg/Pc	0.013
Pc/Ctn	800

F-10 (Use with F-4A/F-10A/F-21)

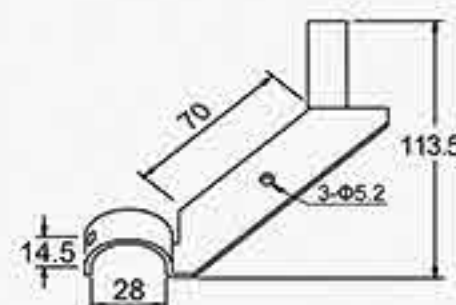


kg/Pc	0.072
Pc/Ctn	90

F-10A (Use with F-4A/F-10/F-21)

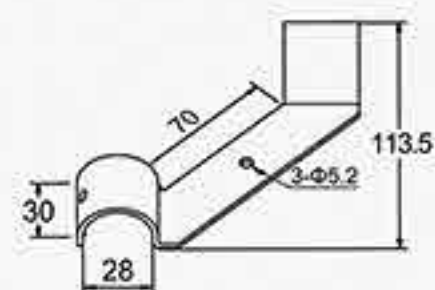


kg/Pc	0.106
Pc/Ctn	75

F-10B (Use with F-4A/F-10/F-21)

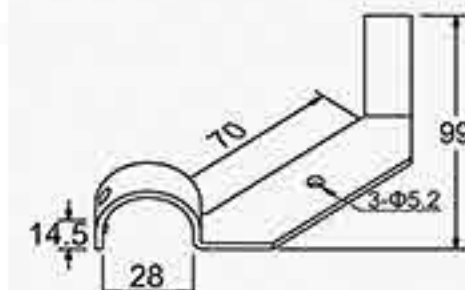


kg/Pc	0.065
Pc/Ctn	75

F-11

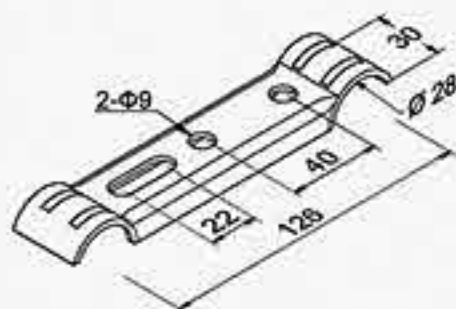

kg/Pc	0.108
Pc/Ctn	120

F-11A

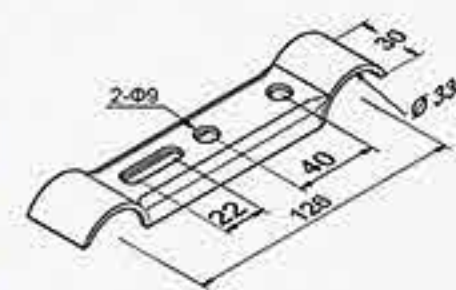


kg/Pc	0.109
Pc/Ctn	120

METAL ACCESSORIES




SURFACE : ●BK ●WZ

F-12A/F-12B/F-12C

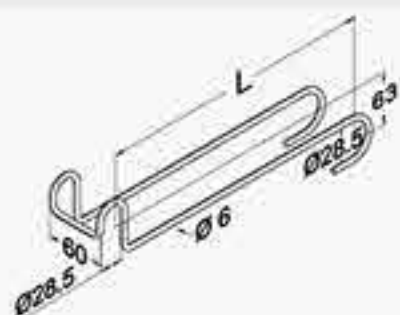


Part No.	F-12A	F-12B	F-12C
L(mm)	235	335	435
kg/Pc	0.183	0.225	0.255
Pc/Ctn	40	30	25

F-13A/F-13B/F-13C/F-13D

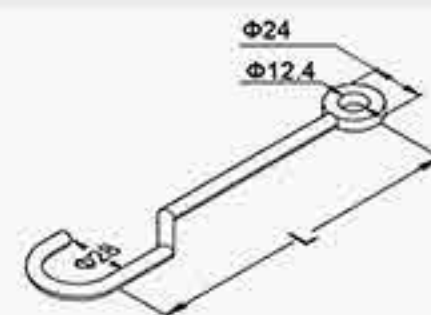


Part No.	F-13A	F-13B	F-13C	F-13D
L(mm)	60	100	150	200
kg/Pc	0.039	0.046	0.059	0.070
Pc/Ctn	350	230	180	150

F-14

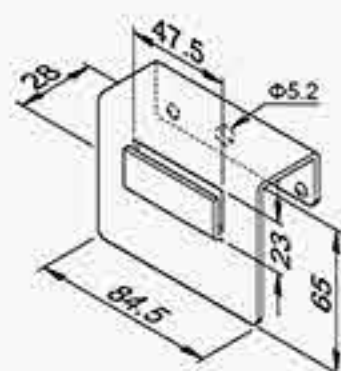


kg/Pc	0.188
Pc/Ctn	60

F-15

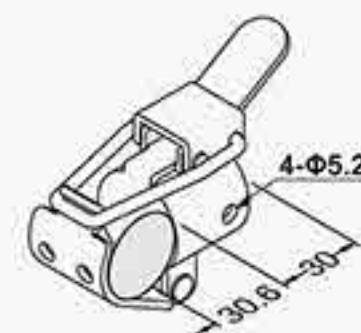


kg/Pc	0.145
Pc/Ctn	75

F-16

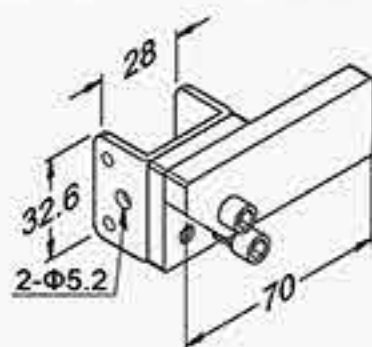


kg/Pc	0.230
Pc/Ctn	130

F-17

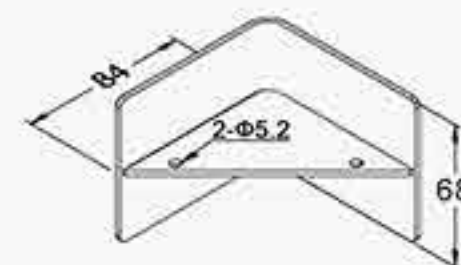


kg/Pc	0.275
Pc/Ctn	25

F-18

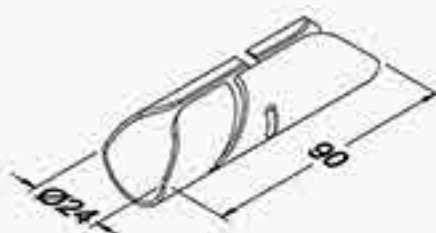


kg/Pc	0.040
Pc/Ctn	120

F-18A

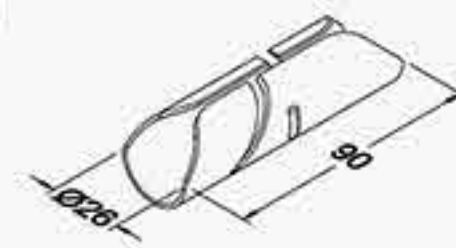


kg/Pc	0.040
Pc/Ctn	120

F-18B

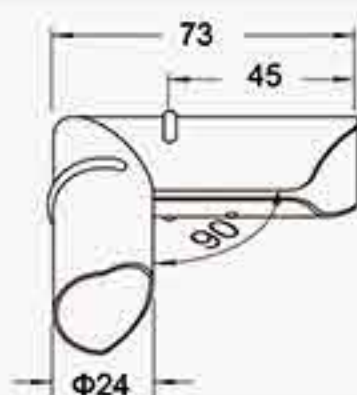

kg/Pc	0.050
Pc/Ctn	80


F-18C

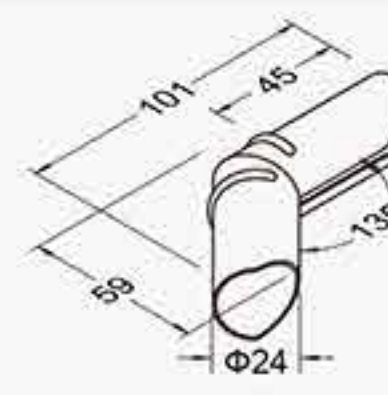

kg/Pc	0.050
Pc/Ctn	100


Unit : mm

F-19

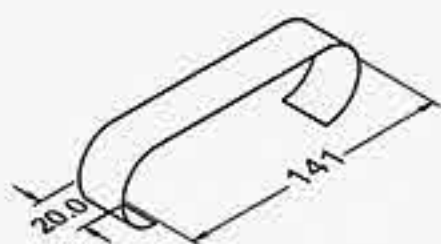


kg/Pc	0.015
Pc/Ctn	200

F-20

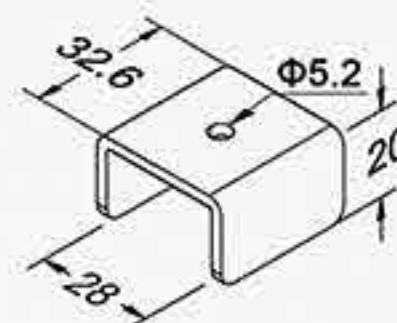


kg/Pc	0.037
Pc/Ctn	500

F-21 (Use with F-4A/F-10/F-10A)

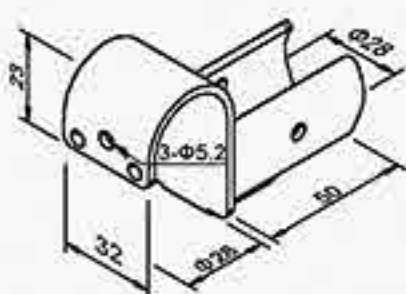


kg/Pc	0.130
Pc/Ctn	80

F-22

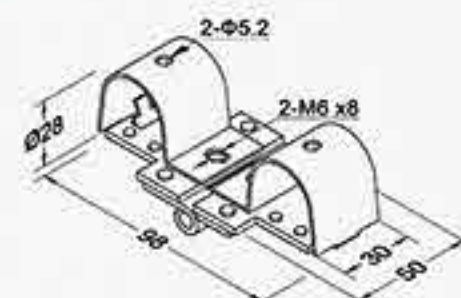


kg/Pc	0.190
Pc/Ctn	40

F-24A

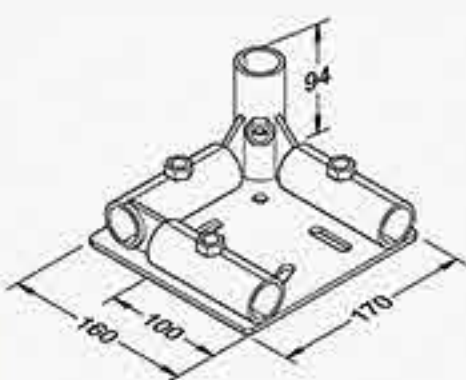

kg/Pc	1.930
Pc/Ctn	4

F-24B

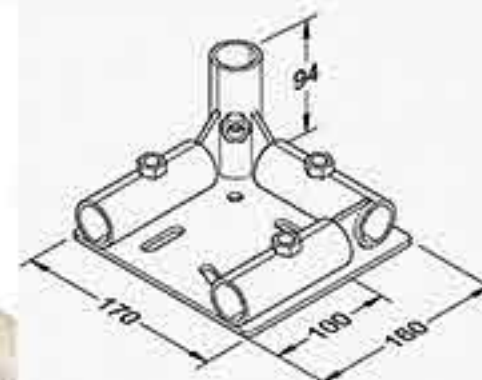


kg/Pc	1.930
Pc/Ctn	4

F-25A




kg/Pc	0.075
Pc/Ctn	120

F-25B

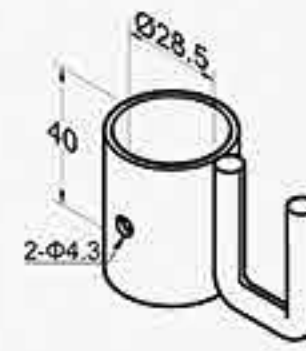


kg/Pc	0.073
Pc/Ctn	120

F-25C

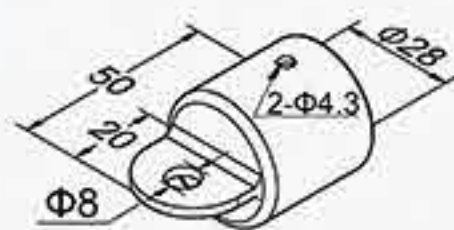

kg/Pc	0.041
Pc/Ctn	220

F-26

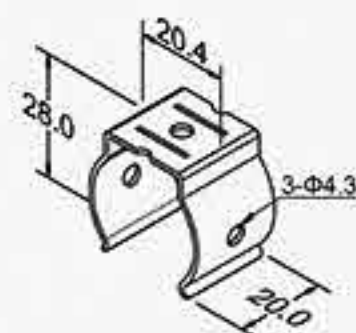

kg/Pc	0.009
Pc/Ctn	400

METAL ACCESSORIES




SURFACE : ●BK ●WZ

F-27




kg/Pc	0.020
Pc/Ctn	150

F-28

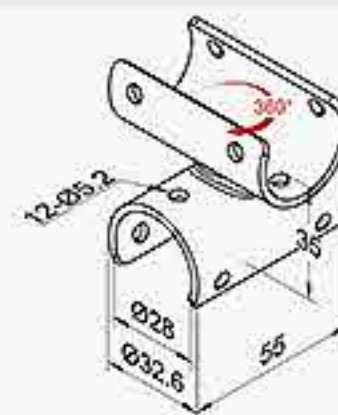


kg/Pc	0.125
Pc/Ctn	80

F-30

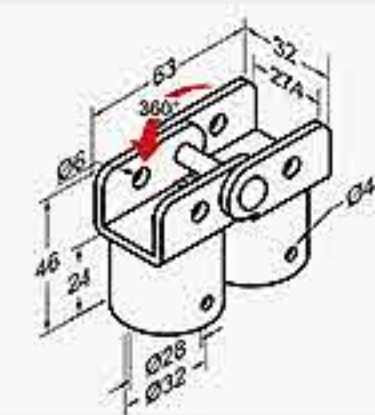

kg/Pc	0.150
Pc/Ctn	150

F-31

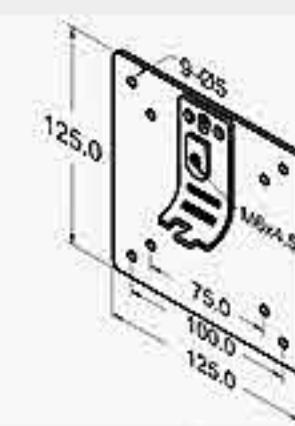

kg/Pc	0.150
Pc/Ctn	150

L Series LEVELING FEET




METAL ACCESSORIES




SURFACE : ●BK ●WZ

L-1

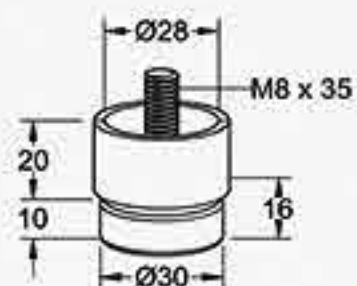


kg/Pc	0.043
Pc/Ctn	180

L-2

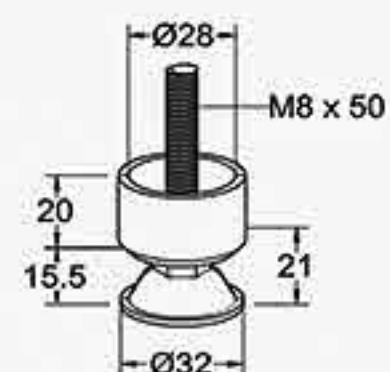


kg/Pc	0.052
Pc/Ctn	140

L-2A

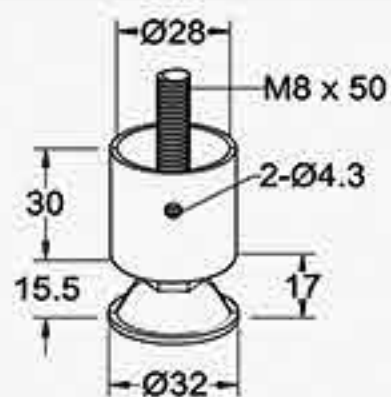


kg/Pc	0.068
Pc/Ctn	130

L-3

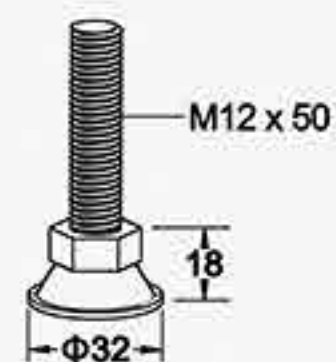


kg/Pc	0.071
Pc/Ctn	200

L-3A

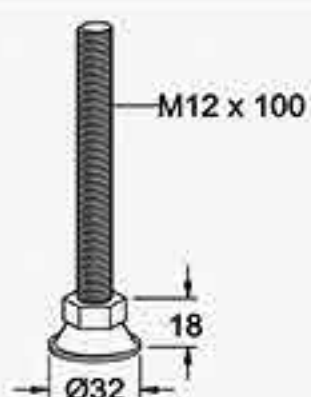


kg/Pc	0.104
Pc/Ctn	130

L-3B

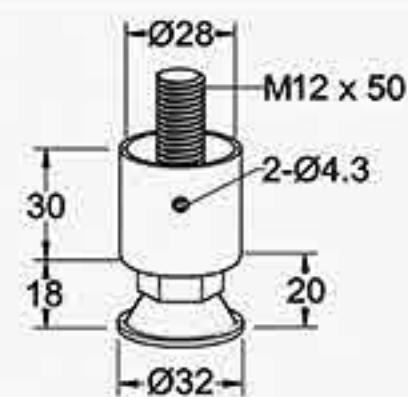

kg/Pc	0.100
Pc/Ctn	120

L-3C

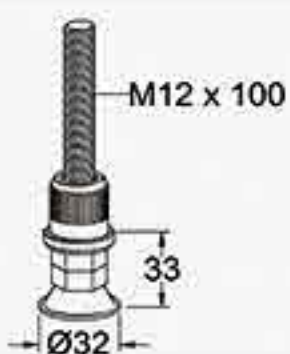

Part No.	L-3CCP10	L-3CCP12
kg/Pc	0.191	0.191
Pc/Ctn	100	100

L-3D




kg/Pc	0.074
Pc/Ctn	200

L-4




kg/Pc	0.094
Pc/Ctn	120

L-4A

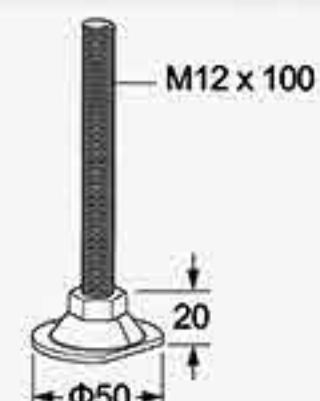

kg/Pc	0.129
Pc/Ctn	80

L-4B

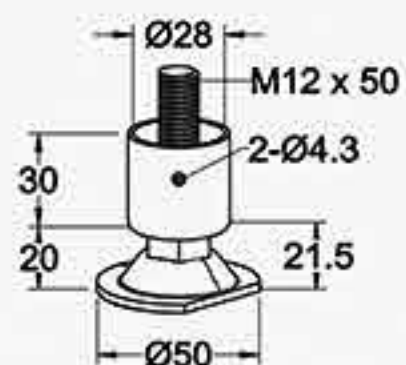


kg/Pc	0.125
Pc/Ctn	85

L-4C



Part No.	L-4CCP10	L-4CCP12
kg/Pc	0.215	0.215
Pc/Ctn	70	70

L-4D

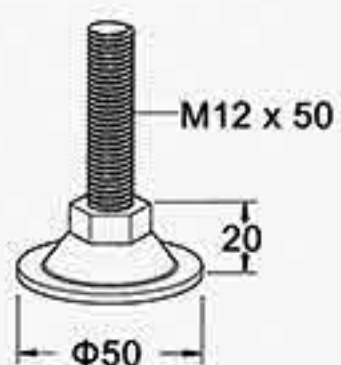


kg/Pc	0.094
Pc/Ctn	120

L-4E




kg/Pc	0.105
Pc/Ctn	100

L-4F

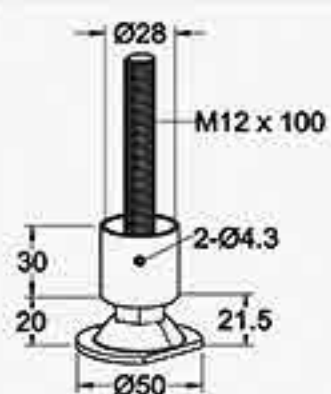


kg/Pc	0.180
Pc/Ctn	100

L-5

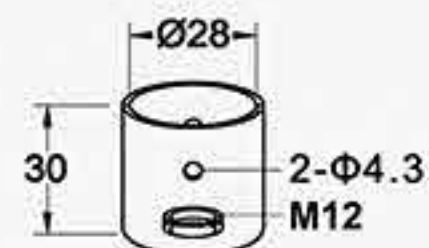


kg/Pc	0.033
Pc/Ctn	200

L-6

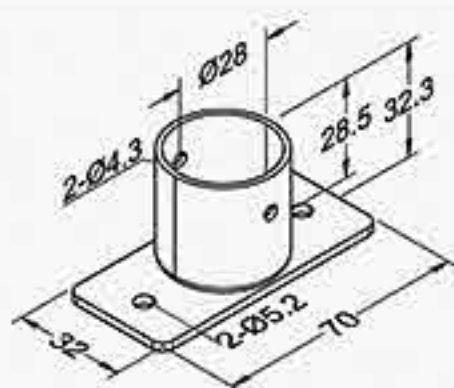


kg/Pc	0.073
Pc/Ctn	120

L-6A

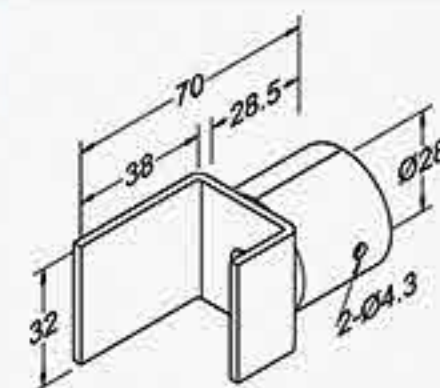


kg/Pc	0.083
Pc/Ctn	140

L-6B

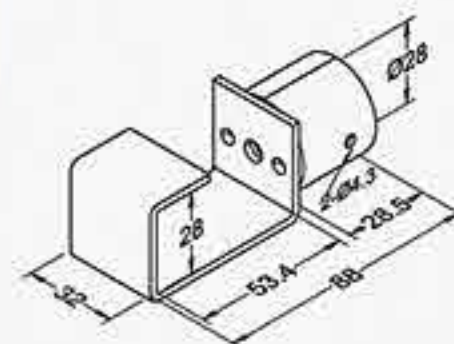

kg/Pc	0.112
Pc/Ctn	100

L-6C

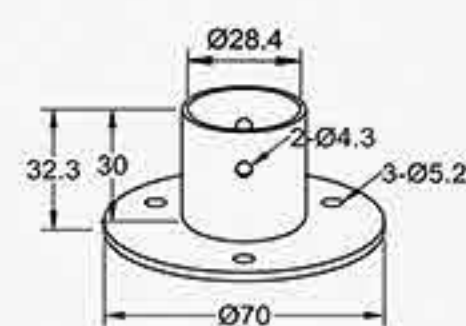


kg/Pc	0.103
Pc/Ctn	80

METAL ACCESSORIES




SURFACE : ●BK ●WZ

L-7

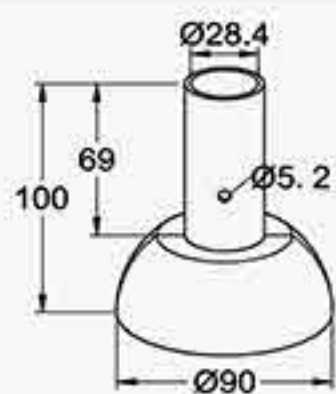


kg/Pc	0.395
Pc/Ctn	15

L-8

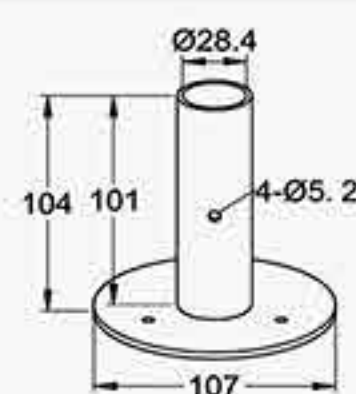


kg/Pc	0.460
Pc/Ctn	15

L-9




kg/Pc	0.230
Pc/Ctn	30

L-10



kg/Pc	0.235
Pc/Ctn	30

L-11



kg/Pc	0.170
Pc/Ctn	60

N Series

FASTENERS



FASTENERS



SURFACE : ● BZ ● BL ● WZ

Picture	Part No.	Desc.	Surface	kg/Pc	Pc/Ctn	Apply
	N-1M6BZ	Nut	BZ	0.002	5400	Bolt
	N-1M6BL		BL			
	N-1M6WZ		WZ			
	N-1ENBZ	Nut	BZ	0.002	5400	Inch Bolt
	N-1ENWZ		WZ			

	N-2BZ	Bolt	BZ	0.007	2700	Nut
	N-2BL		BL			
	N-2WZ		WZ			
	N-2ENBZ	Bolt	BZ	0.007	2700	Inch Nut
	N-2ENWZ		WZ			

	N-2M612BZ	Bolt	BZ	0.005	4000	Nut
	N-2M612WZ		WZ			

	N-3M840WZ	Bolt	WZ	0.017	1200	M8 Nut
---	-----------	------	----	-------	------	--------

	N-6M8WZ	Nylon Nut	WZ	0.002	4000	M8 Bolt
---	---------	-----------	----	-------	------	---------

Picture	Part No.	Classification	Application	kg/Pc	Pc/Ctn	Apply
	N-8CP07WZ (1/2)	Coated Pipe	Φ28 x T0.7	0.075	350	Φ24.6
	N-8CP10WZ (1/2)		Φ28 x T1.0			Φ24.0
	N-8SUS07WZ (1/2)	SUS Pipe	Φ28 x T0.7	0.084	320	Φ26.4

	N-8ACP10M10WZ	Coated Pipe	Φ28 x T1.0	0.075	350	Φ24.0
	N-8ASUS09M10WZ	SUS Pipe	Φ28 x T0.9	0.084	320	Φ26.0
	N-8ASUS11M10WZ		Φ28 x T1.1	0.090		Φ25.6

	N-8ACP07M12WZ	Coated Pipe	Φ28 x T0.7	0.075	350	Φ24.6
	N-8ACP10M12WZ		Φ28 x T1.0			Φ24.0
	N-8ACP14M12WZ		Φ28 x T1.4			Φ23.2
	N-8ACP20M12WZ		Φ28 x T2.0			Φ22.0
	N-8ASUS07M12WZ	SUS Pipe	Φ28 x T0.7	0.084	320	Φ26.4
	N-8ASUS09M12WZ		Φ28 x T0.9	0.090		Φ26.0
	N-8ASUS11M12WZ		Φ28 x T1.1			Φ25.6

Picture	Part No.	Classification	Application	kg/Pc	Pc/Ctn	Apply
N-9						
	N-9M5BZ	Srew Set	NA	0.030	250	Srew Set

N-11						
	N-11CPM12AL	Coated Pipe	Φ28 x T0.7	0.026	350	Φ20.4
			Φ28 x T0.9			
			Φ28 x T1.0			
	N-11CP 1/2 AL		Φ28 x T1.4			
			Φ28 x T2.0			
	N-11SUSM12AL	SUS Pipe	Φ28 x T0.7	0.037	350	Φ23.3
			Φ28 x T0.9			
	N-11SUS 1/2 AL		Φ28 x T1.1			




C Series

CASTERS

CASTERS

Picture	Part No.	 (mm)	Wheel Material	 (mm)	 (kg)	 (mm)	 (mm)
C-3							
	C-3TPR75G	75	TPR	32	100	104	M12 X 60
	C-3TPR75GCP	75	TPR	32	100	104	M12 X 60
	C-3TPR75GSUS	75	TPR	32	100	104	M12 X 60
C-4							
	C-4TPR50G	50	TPR	32	100	90	M12 X 60
	C-4TPR50GCP	50	TPR	32	100	90	M12 X 60
	C-4TPR50GSUS	50	TPR	32	100	90	M12 X 60
	C-4TPR75G	75	TPR	32	100	104	M12 X 60
	C-4TPR75GCP	75	TPR	32	100	104	M12 X 60
	C-4TPR75GSUS	75	TPR	32	100	104	M12 X 60
	C-4TPR100G	100	TPR	32	130	130	M12 X 60
	C-4TPR100GCP	100	TPR	32	130	130	M12 X 60
	C-4TPR100GSUS	100	TPR	32	130	130	M12 X 60
C-4A							
	C-4ATPR75G	75	TPR	32	100	104	M12 X 60
	C-4ATPR75GCP	75	TPR	32	100	104	M12 X 60
	C-4ATPR75GSUS	75	TPR	32	100	104	M12 X 60
	C-4ATPR100G	100	TPR	32	130	130	M12 X 60
	C-4ATPR100GCP	100	TPR	32	130	130	M12 X 60
	C-4ATPR100GSUS	100	TPR	32	130	130	M12 X 60
C-4 ESD							
	C-4TPRES75G	75	TPR	32	100	104	M12 X 60
	C-4TPRES75GCP	75	TPR	32	100	104	M12 X 60
	C-4TPRES75GSUS	75	TPR	32	100	104	M12 X 60
	C-4TPRES100G	100	TPR	32	130	130	M12 X 60
	C-4TPRES100GCP	100	TPR	32	130	130	M12 X 60
	C-4TPRES100GSUS	100	TPR	32	130	130	M12 X 60
C-4A ESD							
	C-4ATPRES75G	75	TPR	32	100	104	M12 X 60
	C-4ATPRES75GCP	75	TPR	32	100	104	M12 X 60
	C-4ATPRES75GSUS	75	TPR	32	100	104	M12 X 60
	C-4ATPRES100G	100	TPR	32	130	130	M12 X 60
	C-4ATPRES100GCP	100	TPR	32	130	130	M12 X 60
	C-4ATPRES100GSUS	100	TPR	32	130	130	M12 X 60

Picture	Part No.	 (mm)	Wheel Material	 (mm)	 (kg)	 (mm)	 (mm)	 (mm)
C-5								
	C-5TPR100G	100	TPR	32	130	128	95 X 67	73 X 45

C-5 ESD								
	C-5TPRES100G	100	TPR	32	130	128	95 X 67	73 X 45

C-7								
	C-7TPR100G	100	TPR	32	130	128	95 X 67	73 X 45

C-7 ESD								
	C-7TPRES100G	100	TPR	32	130	128	95 X 67	73 X 45


CASTERS

Picture	Part No.	 (mm)	Wheel Material	 (mm)	 (kg)	 (mm)	 (mm)	 (mm)
C-8								
	C-8TPR150G	150	TPR	50	410	190	115 X 100	84 X 71.3
C-8 ESD								
	C-8TPRES150G	150	TPR	50	410	190	115 X 100	84 X 71.3
C-8 PU								
	C-8STPU200R	200	PU	50	480	240.5	115 X 100	84 X 71.3

Picture	Part No.	 (mm)	Wheel Material	 (mm)	 (kg)	 (mm)	 (mm)	 (mm)
C-10A								
	C-10ATPR150G	150	TPR	50	410	190	115 X 100	84 X 71.3
C-10A ESD								
	C-10ATPRES150G	150	TPR	50	410	190	115 X 100	84 X 71.3
C-10A PU								
	C-10ASTPU200R	200	PU	50	480	240.5	115 X 100	84 X 71.3


CASTERS

C-14

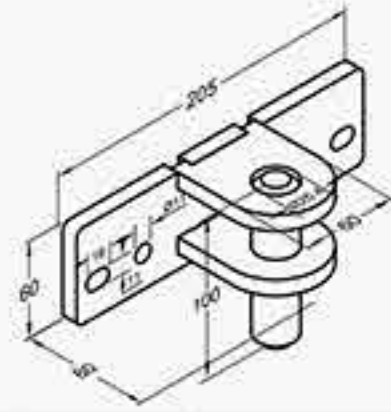

kg/Pc	1.780
Pc/Ctn	9

C-15

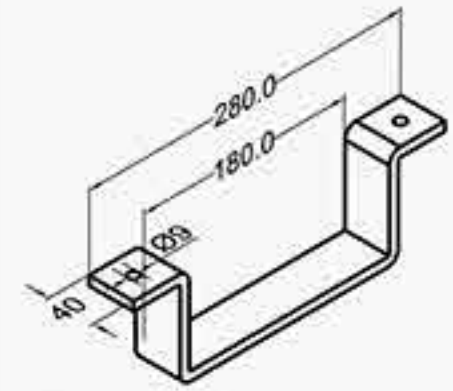


kg/Pc	1.010
Pc/Ctn	20



S Series
SQUARE PIPE


40 Square Pipe

S-1




kg/m	2.389
m/Pc	2.44
m/Bdl	9.76

SJ-1

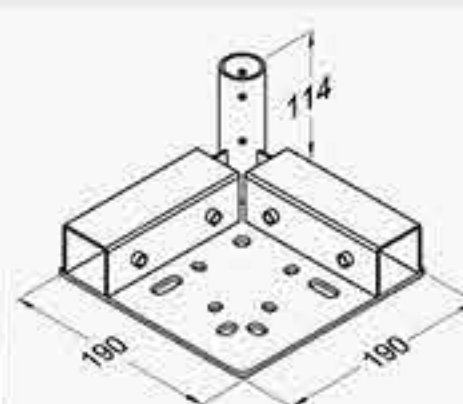


kg/Set	1.92
Sets/Ctn	2

SJ-2

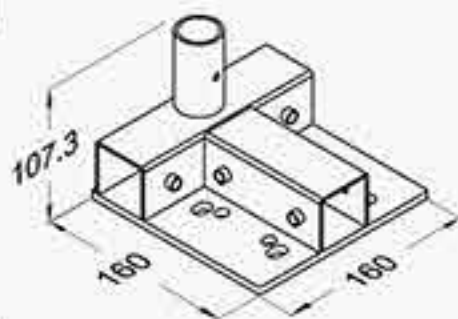


kg/Set	1.50
Sets/Ctn	2

SJ-3

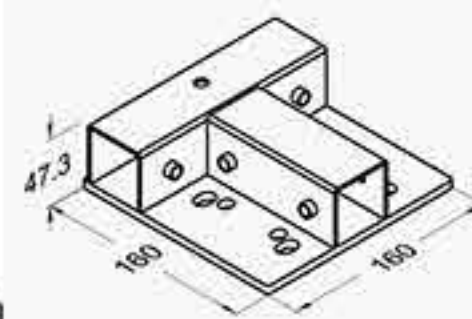


kg/set	1.35
Sets/Ctn	2

SJ-4

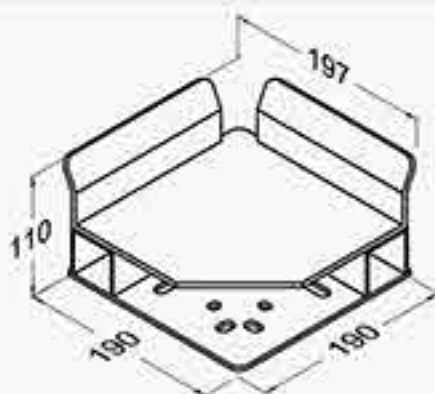

kg/Set	3.64
Sets/Ctn	2

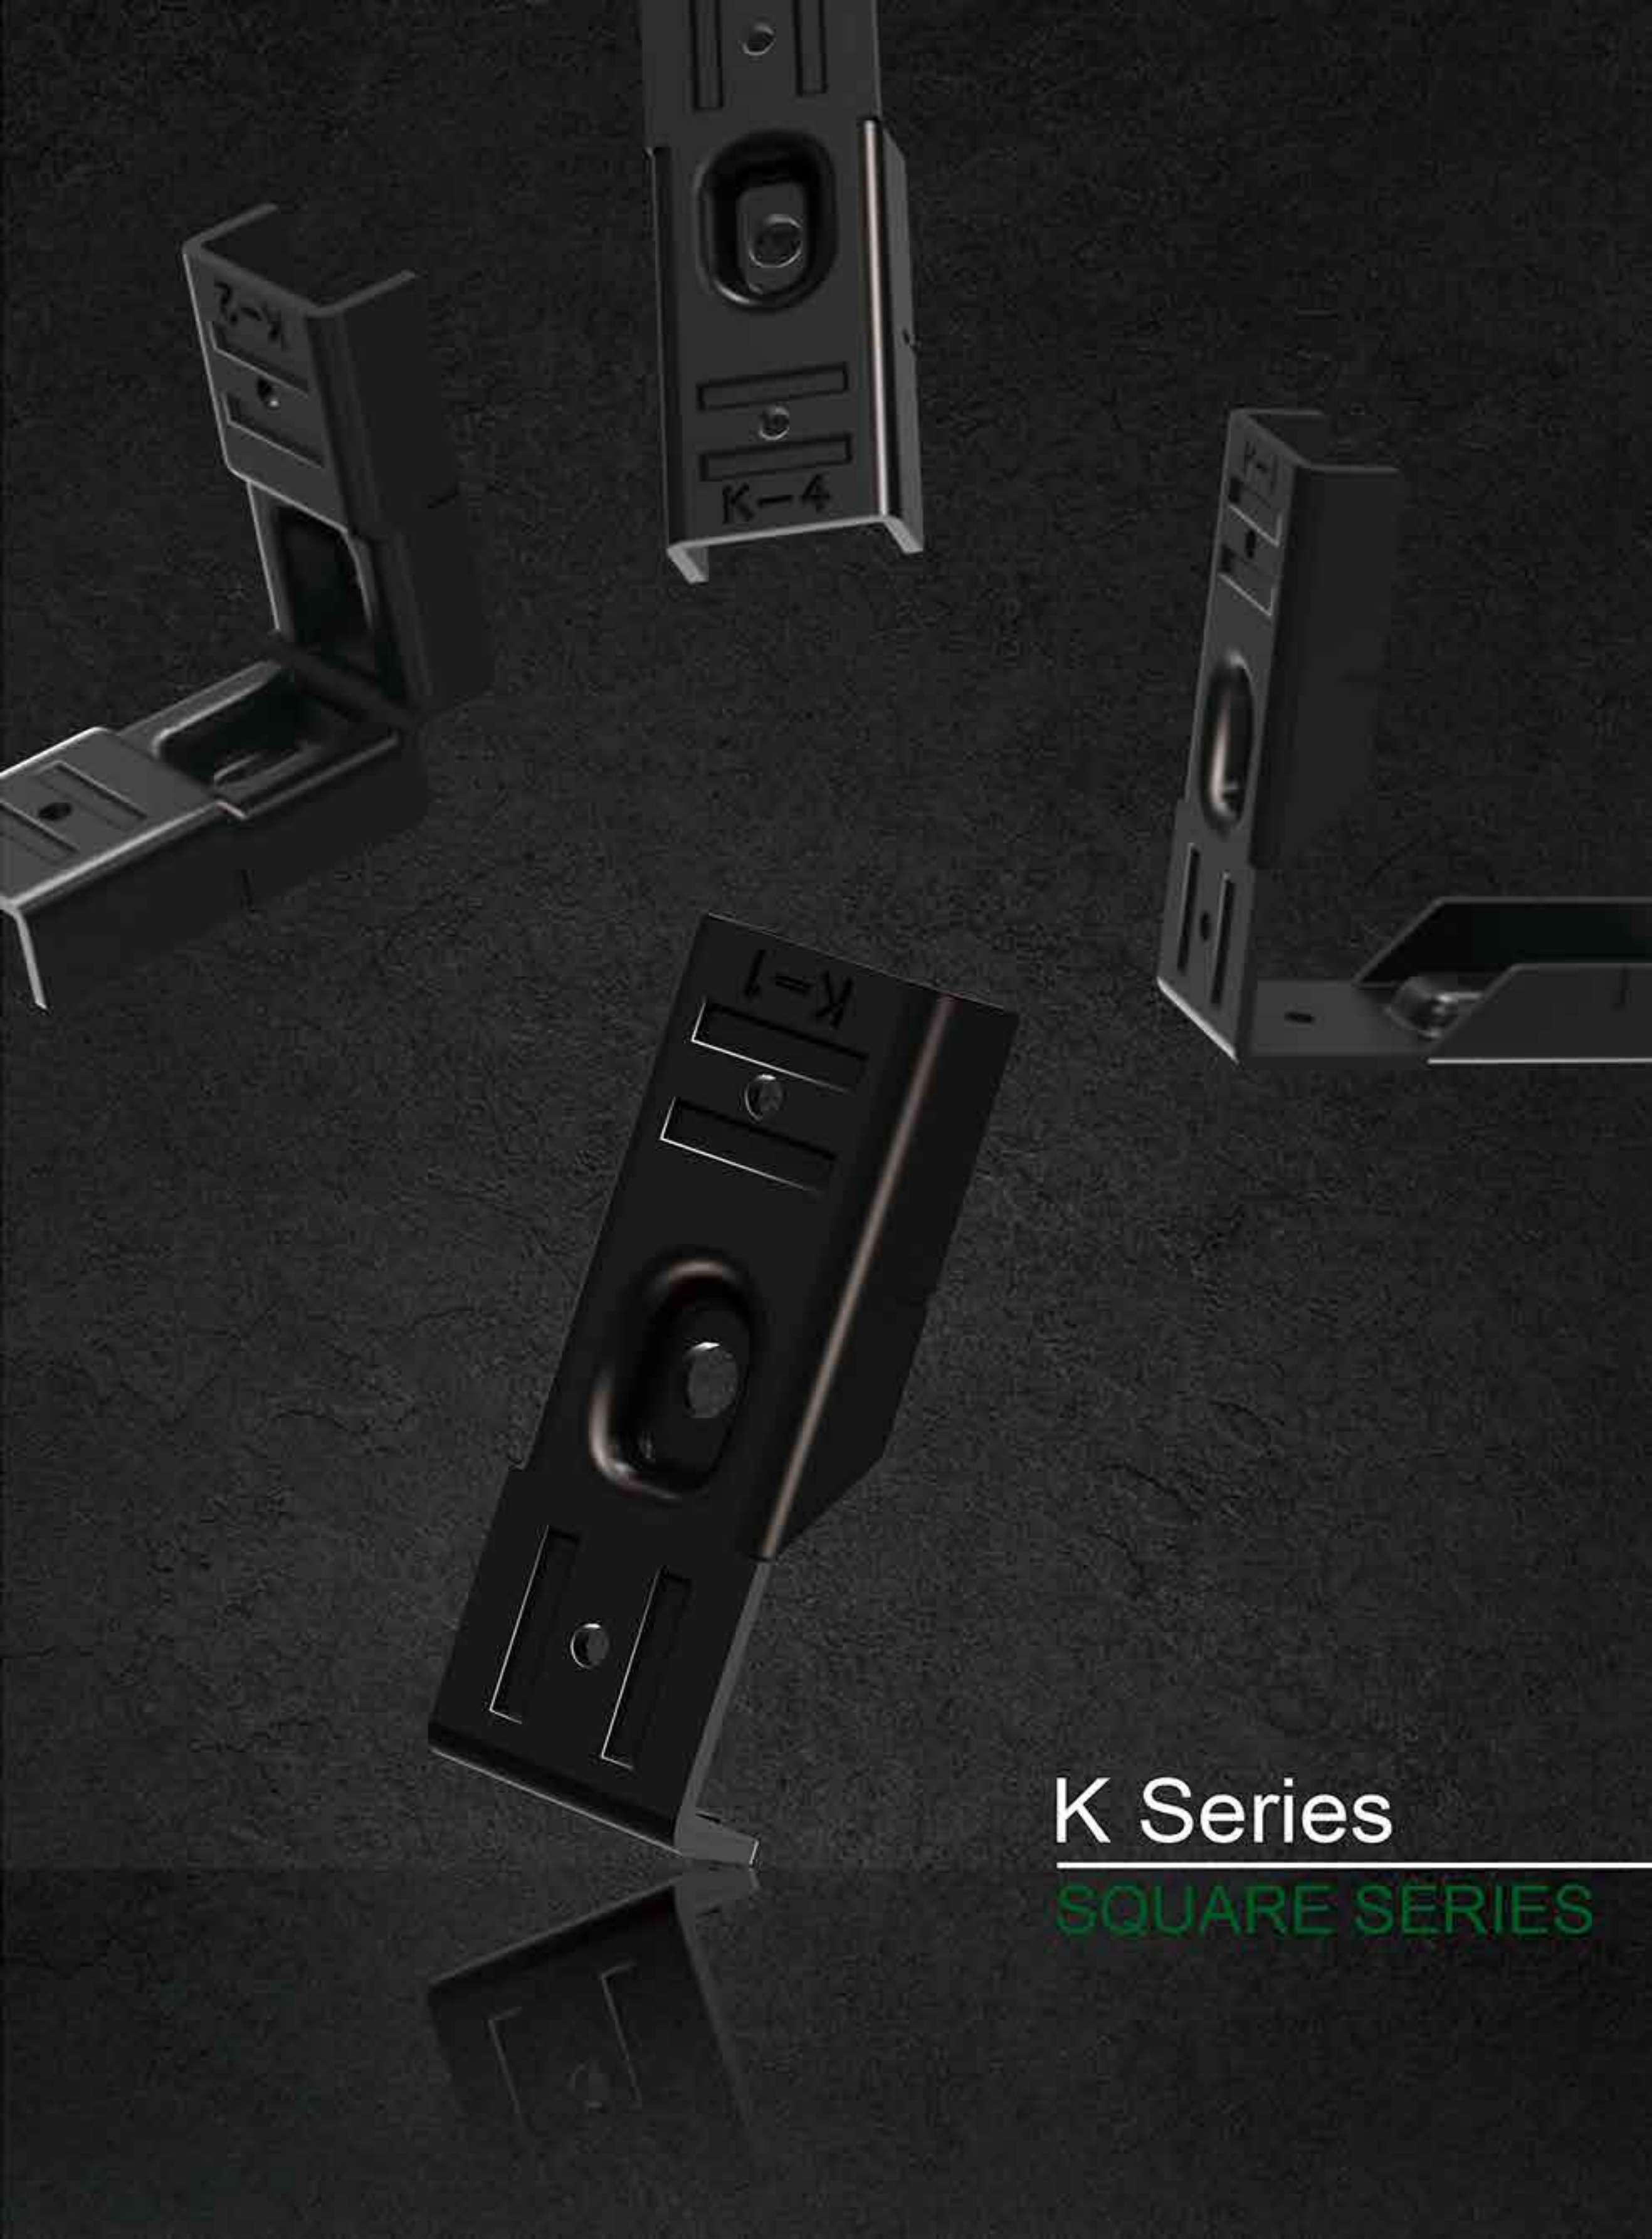


K Series

SQUARE SERIES


27 Square Pipe

K-27




kg/m	2.389
m/Pc	2.44
m/Bdl	9.76

K-1

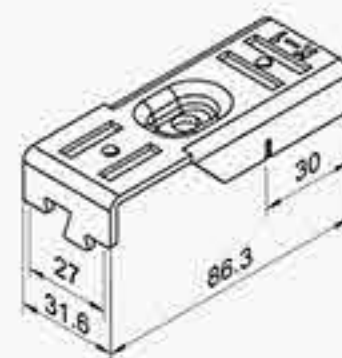


kg/Pc	0.00
Pc/Ctn	00

K-1A

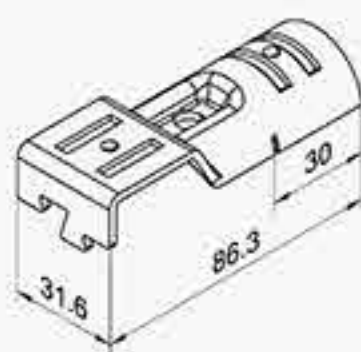


kg/Pc	0.00
Pc/Ctn	00

K-2

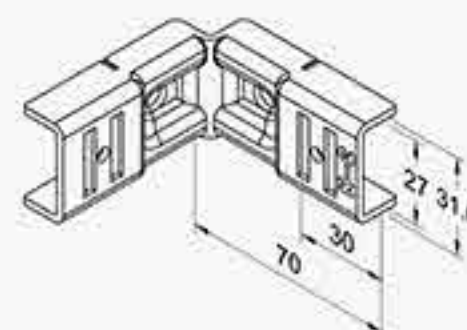


kg/Pc	0.00
Pc/Ctn	00

K-3

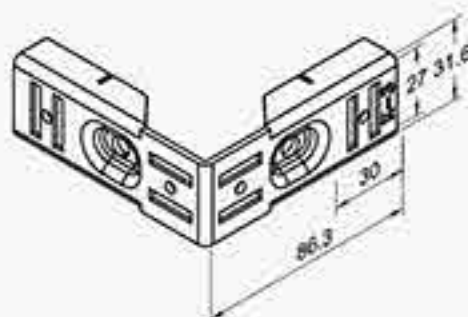


kg/Pc	0.00
Pc/Ctn	00

K-4

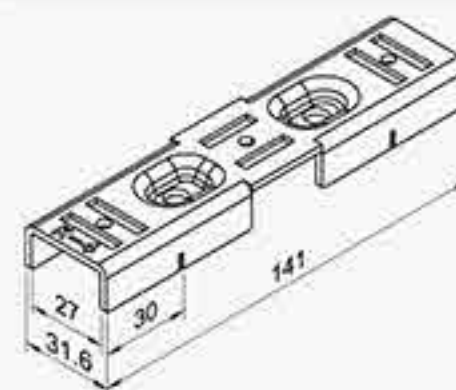

kg/Pc	0.00
Pc/Ctn	00


K-F6

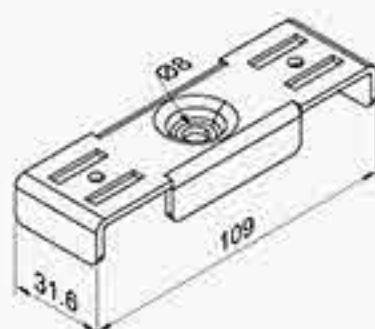

kg/Pc	0.00
Pc/Ctn	00

Unit : mm


KJ-1

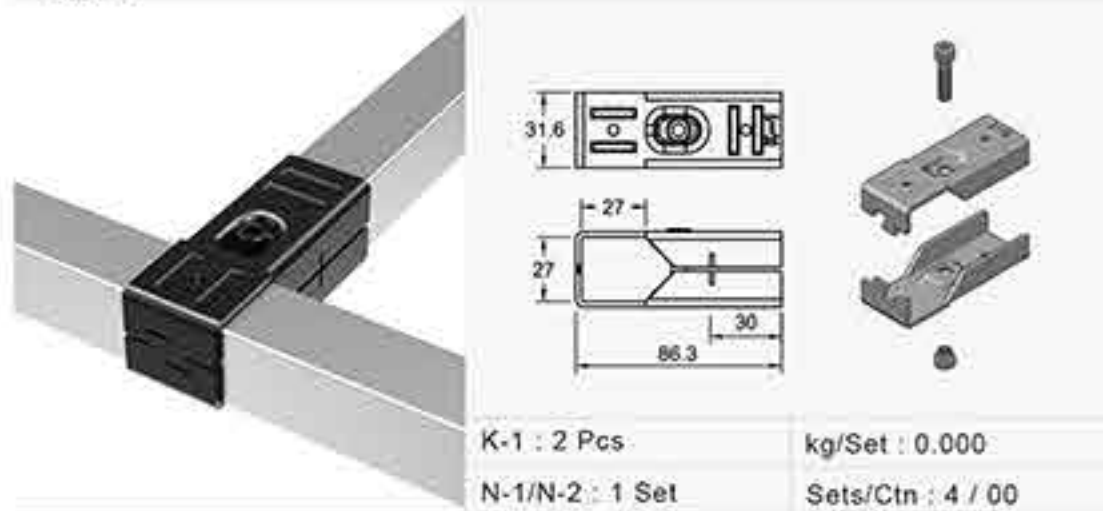


KJ-1A



KJ-2

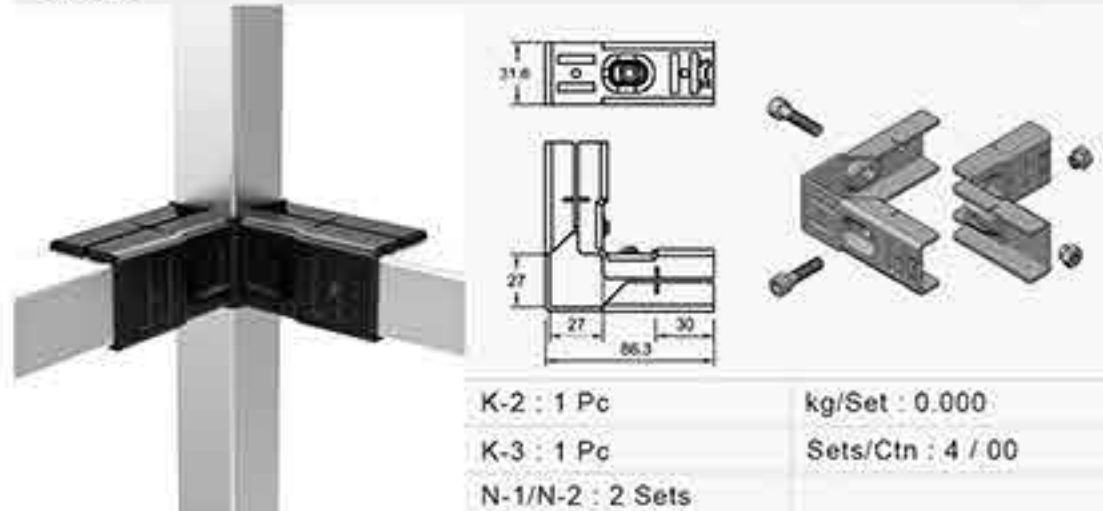

KJ-4

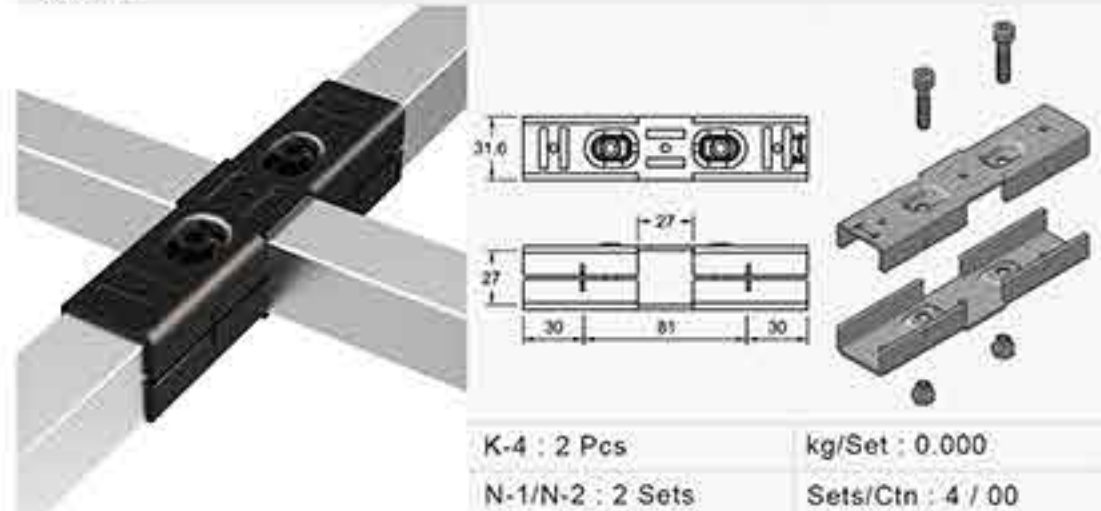

A Series

ALUMINIUM



A Series

Welcome OEM Order



Combining Pipe Racking & Green Frame System

GAJ28-H01



GAJ28-H01A



GAJ28-H02



GAJ28-H03




GAJ28-H04



GAJ28-H05




GA28-14A

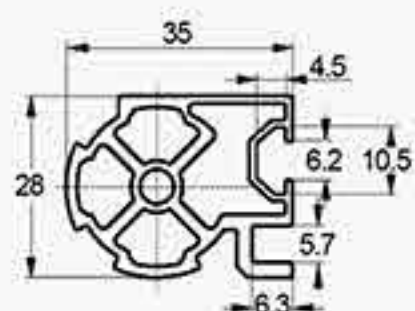


kg/m	0.840
m/Pc	4
m/Bdl	48

GA28-15A




kg/m	0.244
m/PC	4
m/BDL	48

GA28-16A

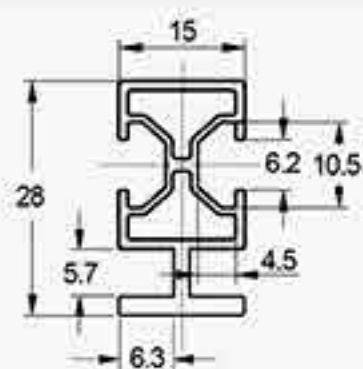


kg/m	0.388
m/Pc	4
m/Bdl	48

GA28-17A-100

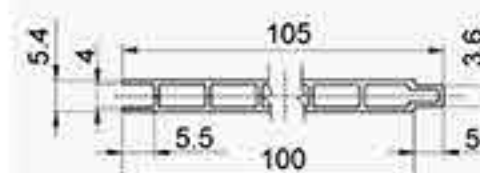


kg/m	0.549
m/Pc	4
m/Bdl	48

GA28-18A-50

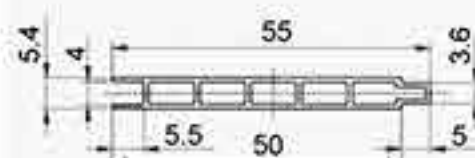


kg/m	0.283
m/Pc	4
m/Bdl	48

GA28-19A-30

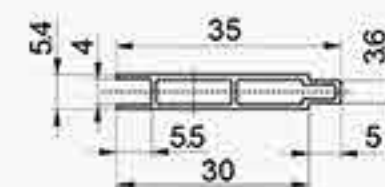


kg/m	0.170
m/Pc	4
m/Bdl	48

GAJ28-B05




kg/Pc	0.042
Pc/Ctn	000

GAE28-46

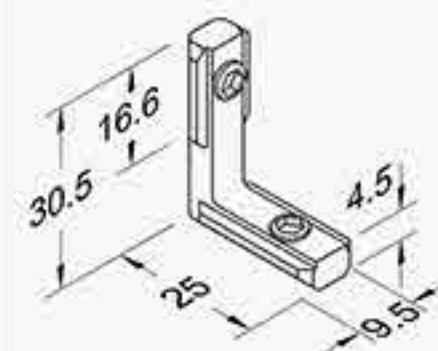


kg/Pc	0.000
Pc/Ctn	000

GAP28-19

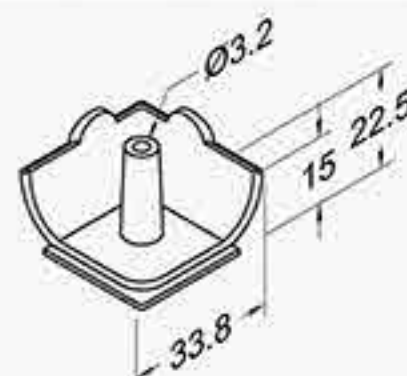

kg/Pc	0.104
Pc/Ctn	130


GAP28-20



kg/Pc	0.100
Pc/Ctn	120

Pallet system assembly

1 Main Frame

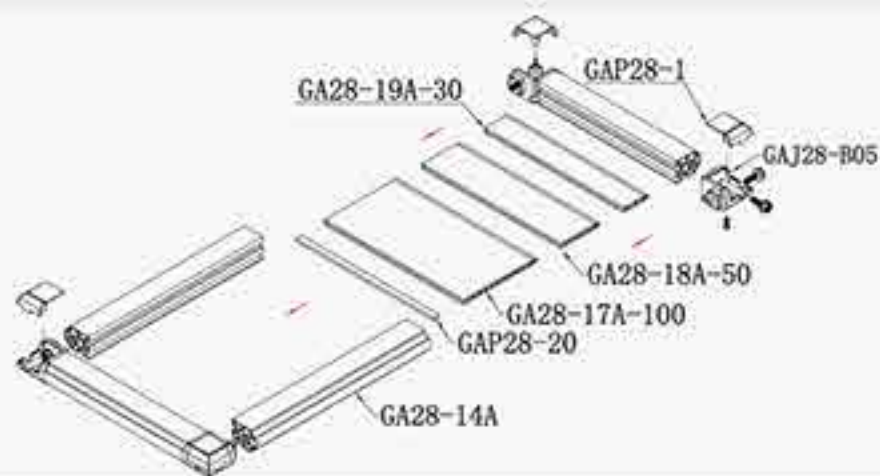


2 Pallet Separate Type Assembly



3 Dimension Select Method

$$\begin{aligned} A &= L - 76 & A &= L2 - 5 \\ X &= W1 + 12 & X &= B + 12 \\ Y &= L2 + 12 & Y &= A + 12 \end{aligned}$$

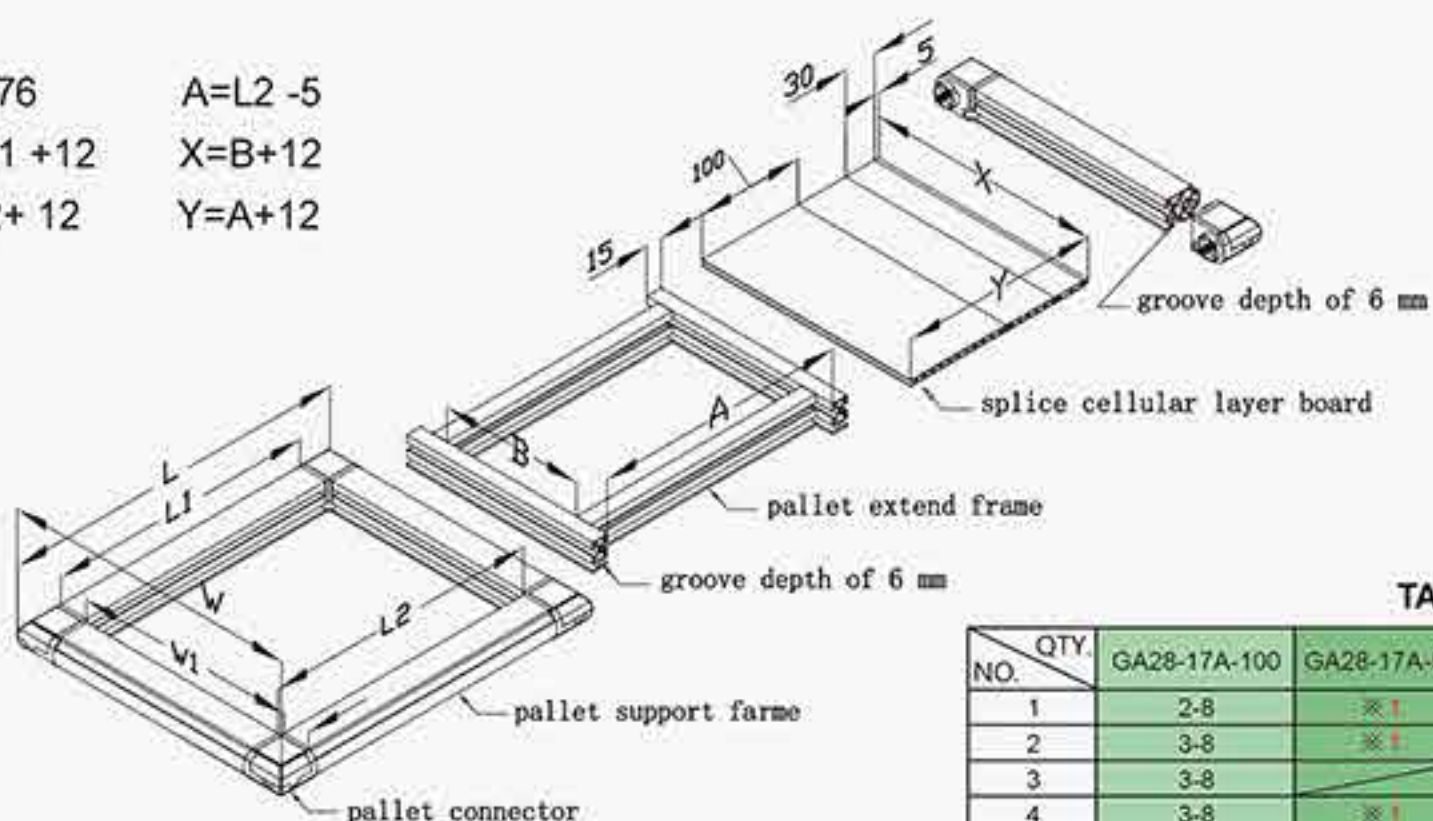


- ※ Layer board width three kinds of cellular layer board +5mm
- ※ When Pallet connector connected with pallet support frame, Please use the outer hexagon socket with electricity tool to lock the tapping screw and set the torque to 8~10N/m

TABLE

NO.	QTY.	GA28-17A-100	GA28-17A-50	GA28-17A-30	L2 / W1 (mm)	L / W (mm)
1	2-8		※ 1	※ 3	333 - 1133	403 - 1203
2	3-8		※ 1		343 - 1143	413 - 1213
3	3-8			※ 2	353 - 1153	423 - 1223
4	3-8		※ 1	※ 1	373 - 1173	443 - 1243
5	3-8			※ 3	383 - 1183	453 - 1253
6	4-8				393 - 1193	463 - 1263
7	3-8		※ 1	※ 2	403 - 1203	473 - 1273
8	3-8			※ 3	413 - 1213	483 - 1283
9	4-8			※ 2	423 - 1223	493 - 1293

※ FIXED QTY.


4 Frame assembly method

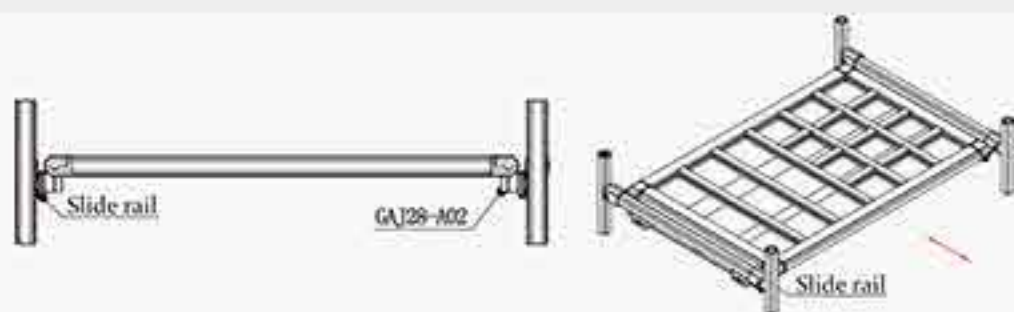

5 Hoisting assembly method



6 Application

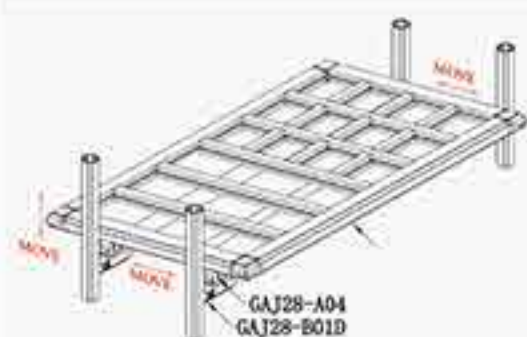

Pallet horizon assembly



Pallet vertical assembly



Shelf



Trolley

O Series TOOLS



TOOLS

O-1



O	5 mm
L	160 mm
A	33 mm
kg/Pc	0.025
Pc/Ctn	396

O-2



O	5 mm
L1	123 mm
L2	16 mm
kg/Pc	0.103
Pc/Ctn	20

O-3/O-3A



Cutting Range	3-32 mm
Set	1 X O-3
Optional Parts	2 X O-3A
kg/Pc	0.417 / 0.019
Pc/Ctn	12

O-4



Cutting Range	Φ 6 - Φ 40 mm
kg/Pc	0.230
Pc/Ctn	32
Tube inside and outside trimming knife.	

O-5/O-5A



Packaging (included)	1xO-5 ordinary trimming blade
	1xO-5A high strength trimming blade
kg/Pc	0.060 / 0.021

O-6



O	13 / 16 mm
Thicknes	3.2 mm
kg/Pc	0.050
Pc/Ctn	200
For caster assembling.	

O-7




L1	1800 mm
L2 Range	0-1800 mm

O-8



Sawing Range (mm)	○	Φ 95
	□	85 X 85
		110 X 75
	●	Φ 55
Max Clamp	■	50 X 50
		110 mm
Main Motor	4/2 1.8 / 2.4 KW	
Saw Blade Type	250 / 275 / 300	

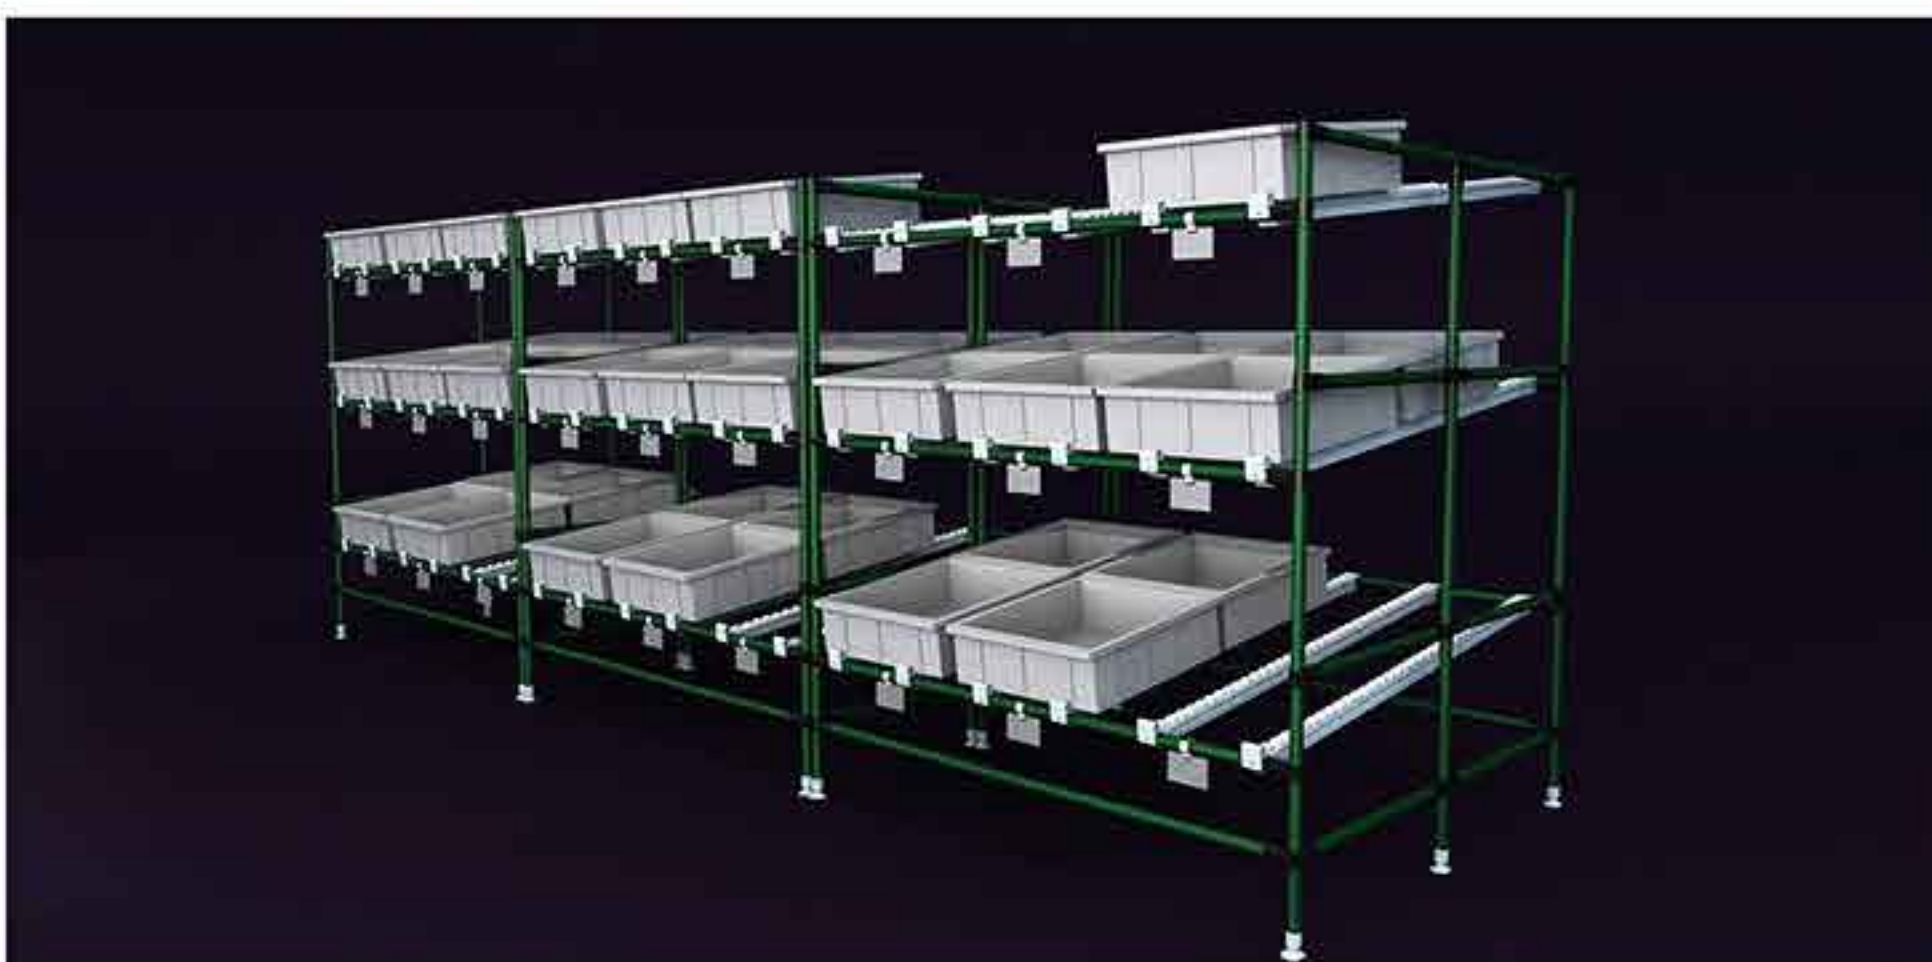



www.rellpipe.com